

09/69/60  
10/18/00

Please type a plus sign (+) inside this box →

+

PTO/SB/05 (12/97)

Approved for use through 09/30/00. OMB 0651-003  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <i>(Only for new nonprovisional applications under 37 CFR 1.53(b))</i>	Attorney Docket No.	COMP:0165 P00-3084	Total Pages	90
	First Named Inventor or Application Identifier			
	David F. Bolognia			
	Express Mail Label No.	EL 652 334 249 US		

<b>APPLICATION ELEMENTS</b>		<b>Assistant Commissioner for Patents</b>	
See MPEP chapter 600 concerning utility patent application contents.		<b>Box Patent Application</b> <b>Washington, DC 20231</b>	
<p>1. <input checked="" type="checkbox"/> <b>Fee Transmittal Form</b> <i>(Submit an original, and a duplicate for fee processing)</i></p> <p>2. <input checked="" type="checkbox"/> <b>Specification</b> <span style="float: right;"><b>Total Pages 37</b></span> <i>(preferred arrangement set forth below)</i>          -Descriptive          -Cross References to Related Application          -Statement Regarding Fed sponsored R &amp; D          -Reference to Microfiche Appendix          -Background of the Invention          -Brief Summary of the Invention          -Brief Description of the Drawings <i>(if filed)</i>          -Detailed Description          -Claim(s)          -Abstract of the Disclosure</p> <p>3. <input checked="" type="checkbox"/> <b>Drawing(s)</b> <i>(35 USC 113)</i> <span style="float: right;"><b>Total Sheets 15</b> <b>Total Pages 45</b></span></p> <p>4. <b>Oath or Declaration</b>          a. <input checked="" type="checkbox"/> <b>Newly executed (original or copy)</b>          b. <input type="checkbox"/> <b>Copy from a prior application (37CFR 1.63(d))</b>  <i>(for continuation/divisional with Box 17 completed)</i>  <b>[Note Box 5 below]</b>          i. <input type="checkbox"/> <b>DELETION OF INVENTOR(S)</b>          Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</p> <p>5. <input type="checkbox"/> <b>Incorporation By Reference</b> <i>(useable if Box 4b is checked)</i>          The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</p>	<p>6. <input type="checkbox"/> <b>Microfiche Computer Program</b> <i>(Appendix)</i></p> <p>7. <b>Nucleotide and/or Amino Acid Sequence Submission</b> <i>(if applicable, all necessary)</i>          a.          b. <input type="checkbox"/> <b>Computer Readable Copy</b>          c. <input type="checkbox"/> <b>Paper Copy (identical to computer copy)</b>  <input type="checkbox"/> <b>Statement verifying identity of above copies</b></p>		
<b>ACCOMPANYING APPLICATION PARTS</b>			
<p>17. <input type="checkbox"/> <b>Continuation</b> <input type="checkbox"/> <b>Divisional</b> <input type="checkbox"/> <b>Continuation-in-part (CIP)</b> of prior application No: _____</p>		<p>8. <input checked="" type="checkbox"/> <b>Assignment Papers</b> (cover sheet &amp; document(s))</p> <p>9. <input checked="" type="checkbox"/> <b>37 CFR 3.73(b) Statement</b> <input type="checkbox"/> <b>Power of Attorney</b> <i>(where there is an assignee)</i></p> <p>10. <input type="checkbox"/> <b>English Translation Document</b> <i>(if applicable)</i></p> <p>11. <input type="checkbox"/> <b>Information Disclosure Statement (IDS)/PTO-1449</b> <input type="checkbox"/> <b>Copies of IDS Citations</b></p> <p>12. <input type="checkbox"/> <b>Preliminary Amendment</b></p> <p>13. <input checked="" type="checkbox"/> <b>Return Receipt Postcard (MPEP 503)</b></p> <p>14. <input type="checkbox"/> <b>Small Entity</b> <input type="checkbox"/> <b>Statement filed in prior application</b>          Statement(s) <span style="float: right;">Status still proper and desired</span></p> <p>15. <input type="checkbox"/> <b>Certified Copy of Priority Document(s)</b> <i>(if foreign priority is claimed)</i></p> <p>16. <input checked="" type="checkbox"/> <b>Other PTO-2038 (Credit card Payment Form)</b></p>	
<b>18. CORRESPONDENCE ADDRESS</b>			
<input type="checkbox"/> <b>Customer Number or Bar Code Label</b> <input type="checkbox"/> <b>Correspondence address below</b>			
(Insert Customer No. or Attach bar code label here)			
<b>NAME</b>	<b>Robert A. Van Someren</b>		
	<b>Fletcher, Yoder &amp; Van Someren</b>		
<b>ADDRESS</b>	<b>P.O. Box 692289</b>		
<b>CITY</b>	<b>Houston</b>	<b>STATE</b>	<b>Texas</b>
<b>COUNTRY</b>	<b>USA</b>	<b>TELEPHONE</b>	<b>(281) 970-4545</b>
		<b>ZIP CODE</b>	<b>77269-2289</b>
		<b>Fax</b>	<b>(281) 970-4503</b>

**Burden Hour Statement:** This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:** Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>FEE TRANSMITTAL</b>		<b>Complete if Known</b>		
		Application Number	Unassigned	
		Filing Date	Herewith	
		First Named Inventor	David F. Bolognia	
		Group Art Unit	Unassigned	
TOTAL AMOUNT OF PAYMENT (\$)		1,010.00	Attorney Docket Number	COMP:0165/VAN (P00-3084)

<b>METHOD OF PAYMENT (check one)</b>		<b>FEE CALCULATION (continued)</b>																																																																																																																																																																															
1. <input type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to. Deposit Account Number <b>06-1315/COMP:0165/VAN</b> Deposit Account Name <b>Fletcher, Yoder &amp; Van Someren</b> <input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 <input type="checkbox"/> Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance, 37 CFR 1.31(b)		<b>3. ADDITIONAL FEES</b> <table border="1"> <thead> <tr> <th>Large Fee Code</th> <th>Entity Fee (\$)</th> <th>Small Fee Code</th> <th>Entity Fee (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>105</td><td>130</td><td>205</td><td>65</td><td>Surcharge - late filing fee or oath</td><td>_____</td></tr> <tr><td>127</td><td>50</td><td>227</td><td>25</td><td>Surcharge - late provisional filing or cover sheet.</td><td>_____</td></tr> <tr><td>139</td><td>130</td><td>139</td><td>130</td><td>Non-English specification</td><td>_____</td></tr> <tr><td>147</td><td>2,520</td><td>147</td><td>2,520</td><td>For filing a request for reexamination</td><td>_____</td></tr> <tr><td>112</td><td>920</td><td>112</td><td>920</td><td>Requesting publication of SIR prior to Examiner action</td><td>_____</td></tr> <tr><td>113</td><td>1,840</td><td>113</td><td>1,840</td><td>Requesting publication of SIR after Examiner action</td><td>_____</td></tr> <tr><td>115</td><td>110</td><td>215</td><td>55</td><td>Extension for response within first month</td><td>_____</td></tr> <tr><td>116</td><td>400</td><td>216</td><td>200</td><td>Extension for response within second month</td><td>_____</td></tr> <tr><td>117</td><td>950</td><td>217</td><td>475</td><td>Extension for response within third month</td><td>_____</td></tr> <tr><td>118</td><td>1,570</td><td>218</td><td>755</td><td>Extension for response within fourth month</td><td>_____</td></tr> <tr><td>119</td><td>310</td><td>219</td><td>155</td><td>Notice of Appeal</td><td>_____</td></tr> <tr><td>120</td><td>310</td><td>220</td><td>155</td><td>Filing a brief in support of an appeal</td><td>_____</td></tr> <tr><td>121</td><td>270</td><td>221</td><td>135</td><td>Request for oral hearing</td><td>_____</td></tr> <tr><td>138</td><td>1,510</td><td>138</td><td>1,510</td><td>Petition to institute a public use proceeding</td><td>_____</td></tr> <tr><td>140</td><td>110</td><td>240</td><td>55</td><td>Petition to revive unavoidably abandoned application</td><td>_____</td></tr> <tr><td>141</td><td>1,320</td><td>241</td><td>660</td><td>Petition to revive unintentionally abandoned application</td><td>_____</td></tr> <tr><td>142</td><td>1,320</td><td>242</td><td>660</td><td>Utility issue fee (or reissue)</td><td>_____</td></tr> <tr><td>143</td><td>450</td><td>243</td><td>225</td><td>Design issue fee</td><td>_____</td></tr> <tr><td>144</td><td>670</td><td>244</td><td>335</td><td>Plant issue fee</td><td>_____</td></tr> <tr><td>122</td><td>130</td><td>122</td><td>130</td><td>Petitions to the Commissioner</td><td>_____</td></tr> <tr><td>123</td><td>50</td><td>123</td><td>50</td><td>Petitions related to provisional applications</td><td>_____</td></tr> <tr><td>126</td><td>240</td><td>126</td><td>240</td><td>Submission of Information Disclosure Stmt</td><td>_____</td></tr> <tr><td>581</td><td>40</td><td>581</td><td>40</td><td>Recording each patent assignment per property (times number of properties)</td><td>40.00</td></tr> <tr><td>146</td><td>790</td><td>246</td><td>395</td><td>Filing a submission after final rejection (37 CFR 1.129(a))</td><td>_____</td></tr> <tr><td>149</td><td>790</td><td>249</td><td>395</td><td>For each additional invention to be examined (37 CFR 1.129(b))</td><td>_____</td></tr> <tr><td colspan="5">Other fee (specify) _____</td><td>_____</td></tr> <tr><td colspan="5">Other fee (specify) _____</td><td>_____</td></tr> <tr><td colspan="5"><b>SUBTOTAL (3)</b></td><td><b>(\$ 40.00)</b></td></tr> </tbody> </table>		Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid	105	130	205	65	Surcharge - late filing fee or oath	_____	127	50	227	25	Surcharge - late provisional filing or cover sheet.	_____	139	130	139	130	Non-English specification	_____	147	2,520	147	2,520	For filing a request for reexamination	_____	112	920	112	920	Requesting publication of SIR prior to Examiner action	_____	113	1,840	113	1,840	Requesting publication of SIR after Examiner action	_____	115	110	215	55	Extension for response within first month	_____	116	400	216	200	Extension for response within second month	_____	117	950	217	475	Extension for response within third month	_____	118	1,570	218	755	Extension for response within fourth month	_____	119	310	219	155	Notice of Appeal	_____	120	310	220	155	Filing a brief in support of an appeal	_____	121	270	221	135	Request for oral hearing	_____	138	1,510	138	1,510	Petition to institute a public use proceeding	_____	140	110	240	55	Petition to revive unavoidably abandoned application	_____	141	1,320	241	660	Petition to revive unintentionally abandoned application	_____	142	1,320	242	660	Utility issue fee (or reissue)	_____	143	450	243	225	Design issue fee	_____	144	670	244	335	Plant issue fee	_____	122	130	122	130	Petitions to the Commissioner	_____	123	50	123	50	Petitions related to provisional applications	_____	126	240	126	240	Submission of Information Disclosure Stmt	_____	581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00	146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	_____	149	790	249	395	For each additional invention to be examined (37 CFR 1.129(b))	_____	Other fee (specify) _____					_____	Other fee (specify) _____					_____	<b>SUBTOTAL (3)</b>					<b>(\$ 40.00)</b>
Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid																																																																																																																																																																												
105	130	205	65	Surcharge - late filing fee or oath	_____																																																																																																																																																																												
127	50	227	25	Surcharge - late provisional filing or cover sheet.	_____																																																																																																																																																																												
139	130	139	130	Non-English specification	_____																																																																																																																																																																												
147	2,520	147	2,520	For filing a request for reexamination	_____																																																																																																																																																																												
112	920	112	920	Requesting publication of SIR prior to Examiner action	_____																																																																																																																																																																												
113	1,840	113	1,840	Requesting publication of SIR after Examiner action	_____																																																																																																																																																																												
115	110	215	55	Extension for response within first month	_____																																																																																																																																																																												
116	400	216	200	Extension for response within second month	_____																																																																																																																																																																												
117	950	217	475	Extension for response within third month	_____																																																																																																																																																																												
118	1,570	218	755	Extension for response within fourth month	_____																																																																																																																																																																												
119	310	219	155	Notice of Appeal	_____																																																																																																																																																																												
120	310	220	155	Filing a brief in support of an appeal	_____																																																																																																																																																																												
121	270	221	135	Request for oral hearing	_____																																																																																																																																																																												
138	1,510	138	1,510	Petition to institute a public use proceeding	_____																																																																																																																																																																												
140	110	240	55	Petition to revive unavoidably abandoned application	_____																																																																																																																																																																												
141	1,320	241	660	Petition to revive unintentionally abandoned application	_____																																																																																																																																																																												
142	1,320	242	660	Utility issue fee (or reissue)	_____																																																																																																																																																																												
143	450	243	225	Design issue fee	_____																																																																																																																																																																												
144	670	244	335	Plant issue fee	_____																																																																																																																																																																												
122	130	122	130	Petitions to the Commissioner	_____																																																																																																																																																																												
123	50	123	50	Petitions related to provisional applications	_____																																																																																																																																																																												
126	240	126	240	Submission of Information Disclosure Stmt	_____																																																																																																																																																																												
581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00																																																																																																																																																																												
146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	_____																																																																																																																																																																												
149	790	249	395	For each additional invention to be examined (37 CFR 1.129(b))	_____																																																																																																																																																																												
Other fee (specify) _____					_____																																																																																																																																																																												
Other fee (specify) _____					_____																																																																																																																																																																												
<b>SUBTOTAL (3)</b>					<b>(\$ 40.00)</b>																																																																																																																																																																												
2. <input checked="" type="checkbox"/> Payment Enclosed: <input type="checkbox"/> Check <input type="checkbox"/> Money Order <input checked="" type="checkbox"/> Other <b>PTO-2038 (Credit Card Payment Form)</b> <b>FEE CALCULATION (fees effective 10/01/96)</b>		<b>1. FILING FEE</b> <table border="1"> <thead> <tr> <th>Large Entity Fee Code</th> <th>Large Entity Fee (\$)</th> <th>Small Entity Fee Code</th> <th>Small Entity Fee (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>101</td><td>710</td><td>201</td><td>355</td><td>Utility filing fee</td><td>710.00</td></tr> <tr><td>106</td><td>320</td><td>206</td><td>160</td><td>Design filing fee</td><td>_____</td></tr> <tr><td>107</td><td>490</td><td>207</td><td>245</td><td>Plant filing fee</td><td>_____</td></tr> <tr><td>108</td><td>710</td><td>208</td><td>355</td><td>Reissue filing fee</td><td>_____</td></tr> <tr><td>114</td><td>150</td><td>214</td><td>75</td><td>Provisional filing fee</td><td>_____</td></tr> <tr><td colspan="5"><b>SUBTOTAL (1)</b></td><td><b>(\$ 710.00)</b></td></tr> </tbody> </table>		Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description	Fee Paid	101	710	201	355	Utility filing fee	710.00	106	320	206	160	Design filing fee	_____	107	490	207	245	Plant filing fee	_____	108	710	208	355	Reissue filing fee	_____	114	150	214	75	Provisional filing fee	_____	<b>SUBTOTAL (1)</b>					<b>(\$ 710.00)</b>																																																																																																																																				
Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description	Fee Paid																																																																																																																																																																												
101	710	201	355	Utility filing fee	710.00																																																																																																																																																																												
106	320	206	160	Design filing fee	_____																																																																																																																																																																												
107	490	207	245	Plant filing fee	_____																																																																																																																																																																												
108	710	208	355	Reissue filing fee	_____																																																																																																																																																																												
114	150	214	75	Provisional filing fee	_____																																																																																																																																																																												
<b>SUBTOTAL (1)</b>					<b>(\$ 710.00)</b>																																																																																																																																																																												
<b>2. CLAIMS</b> <table border="1"> <thead> <tr> <th>Total Claims</th> <th>Extra</th> <th>Fee from below</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>30 - 20 = 10</td><td>X</td><td>18</td><td>180.00</td></tr> <tr><td>4 - 3 = 1</td><td>X</td><td>80</td><td>80.00</td></tr> <tr><td colspan="4">Multiple Dependent Claims _____ X _____ = _____</td></tr> </tbody> </table>		Total Claims	Extra	Fee from below	Fee Paid	30 - 20 = 10	X	18	180.00	4 - 3 = 1	X	80	80.00	Multiple Dependent Claims _____ X _____ = _____				<table border="1"> <thead> <tr> <th>Large Entity Fee Code</th> <th>Large Entity Fee (\$)</th> <th>Small Entity Fee Code</th> <th>Small Entity Fee (\$)</th> <th>Fee Description</th> </tr> </thead> <tbody> <tr><td>103</td><td>18</td><td>203</td><td>9</td><td>Claims in excess of 20</td></tr> <tr><td>102</td><td>80</td><td>202</td><td>40</td><td>Independent claims in excess of 3</td></tr> <tr><td>104</td><td>270</td><td>204</td><td>135</td><td>Multiple dependent claim</td></tr> <tr><td>109</td><td>80</td><td>209</td><td>40</td><td>Reissue independent claims over original patent</td></tr> <tr><td>110</td><td>18</td><td>210</td><td>9</td><td>Reissue claims in excess of 20 and over original patent</td></tr> <tr><td colspan="5"><b>SUBTOTAL (2)</b></td></tr> </tbody> </table>		Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description	103	18	203	9	Claims in excess of 20	102	80	202	40	Independent claims in excess of 3	104	270	204	135	Multiple dependent claim	109	80	209	40	Reissue independent claims over original patent	110	18	210	9	Reissue claims in excess of 20 and over original patent	<b>SUBTOTAL (2)</b>																																																																																																																															
Total Claims	Extra	Fee from below	Fee Paid																																																																																																																																																																														
30 - 20 = 10	X	18	180.00																																																																																																																																																																														
4 - 3 = 1	X	80	80.00																																																																																																																																																																														
Multiple Dependent Claims _____ X _____ = _____																																																																																																																																																																																	
Large Entity Fee Code	Large Entity Fee (\$)	Small Entity Fee Code	Small Entity Fee (\$)	Fee Description																																																																																																																																																																													
103	18	203	9	Claims in excess of 20																																																																																																																																																																													
102	80	202	40	Independent claims in excess of 3																																																																																																																																																																													
104	270	204	135	Multiple dependent claim																																																																																																																																																																													
109	80	209	40	Reissue independent claims over original patent																																																																																																																																																																													
110	18	210	9	Reissue claims in excess of 20 and over original patent																																																																																																																																																																													
<b>SUBTOTAL (2)</b>																																																																																																																																																																																	

SUBMITTED BY		Complete (if applicable)	
Typed or Printed Name	Robert A. Van Someren	Reg. Number	36,038
Signature		Date	October 18, 2000
		Deposit Acct. User ID	06-1315 - COMP:0165/VAN (P00-3084)


U.S. Patent Application For

**RETRACTABLE DISPLAY MODULE**

By:

David F. Bolognia  
Spring, Texas

Everett R. Salinas  
Pasadena, Texas

<b>"EXPRESS MAIL" MAILING LABEL</b>	
Number:	<u>EL 652 334 249 US</u>
Date of Deposit:	<u>October 18, 2000</u>
<i>Pursuant to 37 C.F.R. § 1.10, I hereby certify that I am personally depositing this paper or fee with the U.S. Postal Service, "Express Mail Post Office to Addressee" service on the date indicated above in a sealed envelope (a) having the above-numbered Express Mail label and sufficient postage affixed, and (b) addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.</i>	
Signature:	
Printed Name:	<u>Janice Munoz</u>

## RETRACTABLE DISPLAY MODULE

### FIELD OF THE INVENTION

5           The present invention relates generally to a retractable display module, and particularly to a retractable display module utilized with servers and other processor-based devices.

### BACKGROUND OF THE INVENTION

10           In many processor-based devices, e.g. servers, chassis size and overall package size has been reduced to conserve physical space requirements. For example, some servers have been designed with a one unit or 1U profile that  
15 results in a thin or low overall package. Accordingly it has become more difficult to provide numerous features at the front portion of such devices. Often, it is desirable to provide a display screen, such as an LCD display, that can provide an operator with a variety of information about  
20 the operation of the device or components within the device. However, conventional displays require substantial space at the front of the device.

          It would be advantageous to have a display that could  
25 be removed to a space-conserving location when not in use.

SUMMARY OF THE INVENTION

According to one aspect of the present invention, a server is provided with a retractable LCD module. The LCD module may be moved between a retracted position within the chassis of the server and an open position where the display is visible. In one embodiment, the LCD module is pivoted to a position generally perpendicular to the front of the server and retracted into a narrow guide housing.

According to another aspect of the invention, an information display module is incorporated into a processor-based device. The information display module may be an LCD module movable between a retracted, space-conserving position and an open, visible position. In one embodiment, the information display module may be pivoted from its open position to a position generally perpendicular to the front of the device. Also, the information display module may be resiliently biased to its retracted position.

20

According to another aspect of the invention, a method is provided for conserving space at the front of a processor-based device, such as a server. The method includes storing a display module in a guide housing within

the device when the display module is not in use. The method further includes removing the display module to an open position where it can be used. In an exemplary embodiment, the display module is an LCD module stored in a position generally perpendicular to the front of the device. However, the display module can be pulled from its storage position and pivoted to a visible position at the front of the device.

10

**BRIEF DESCRIPTION OF THE DRAWINGS**

The invention will hereafter be described with reference to the accompanying drawings, wherein like reference numerals denote like elements, and:

15

Figure 1 is a perspective view of a rack with a plurality of processor-based devices, e.g. servers, mounted therein;

Figure 2 is a front view of a low profile server;

20

Figure 3 is a partially exploded perspective view of the server illustrated in Figure 2;

Figure 4 is a cross-sectional view taken generally along line 4-4 of Figure 3;

Figure 5 is a perspective view of a cable tray  
5 disposed within the chassis of an exemplary server;

Figure 6 is a cross-sectional view taken generally along line 6-6 of Figure 5;

10 Figure 7 is a perspective view of a PCI card riser assembly designed for mounting in a low profile chassis of an exemplary server;

Figure 8 is a cross-sectional view of the PCI card  
15 assembly taken generally along line 8-8 of Figure 7;

Figure 9 is a cross-sectional view similar to Figure 8 but showing the PCI card assembly in an eject position;

20 Figure 10 is a perspective view of the right end of the riser assembly illustrated in Figure 7;

Figure 10A is a perspective bottom view of the riser assembly illustrated in Figure 7;

Figure 11 is a partial front view of an exemplary server illustrating an indicator;

5        Figure 12 is partial rear view of an exemplary server illustrating a rear indicator;

Figure 13 is a circuit diagram for use with the indicators illustrated in Figures 11 and 12;

10

Figure 13a is a diagram representing the functionality of the circuit illustrated in Figure 13;

Figure 14 is a perspective view of a retractable LCD  
15    module in a retracted position within an exemplary server;

Figure 15 is a perspective view of the retractable LCD unit illustrated in Figure 14 but in an open or operable position;

20

Figure 16 is a top view of the LCD unit in an open position;



Figure 17 is a top view similar to Figure 16 but with the LCD unit in a retracted position;

Figure 18 is a top view of a cable management system  
5 deployed with an exemplary server that is retracted in a rack;

Figure 19 is a top view of the cable management system illustrated in Figure 18 with the exemplary server extended  
10 from the rack;

Figure 20 is a perspective view of a portion of an exemplary rack and rail; and

15 Figure 21 is an exploded view of an end of the rail illustrated in Figure 20.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring generally to Figure 1, an exemplary  
20 implementation of the present invention is illustrated. In this embodiment, a plurality of densely packaged, processor-based devices 30 are shown mounted in a rack system 32. Rack system 32 is designed to slidably receive a plurality of the processor-based devices 30. Typically,

devices 30 are mounted on retractable rails that permit the device to be moved between a retracted position within rack 32 and an extended position in which the device is at least partially extended from rack system 32. This extension  
5 allows removal or servicing of an individual device 30, as illustrated in Figure 1.

Throughout this description, an exemplary processor-based device is described and referenced as server 30, but  
10 other devices also can benefit from the unique features described herein. The exemplary server 30 is a low profile server, such as a 1U server designed to occupy one unit of vertical space in rack system 32.

15 Server 30 includes a chassis 34 having a front 35 designed with pair of drive bays 36. Drive bays 36 are configured to receive a pair of hot pluggable drives 38. The front of chassis 34 also may be designed to receive an ejectable CD drive assembly 40 and an ejectable floppy  
20 drive assembly 42. In the particular design illustrated, CD drive assembly 40 and floppy drive assembly 42 are combined and removable or insertable as a single unit. The exemplary design also includes other features, such as a

retractable liquid crystal display (LCD) 44 and an indicator panel 46.

In server 30, components are densely packaged, but  
5 adequate cooling of the components is maintained. As  
illustrated in Figure 3, chassis 34 is divided into at  
least two general zones, including a high pressure, high  
airflow zone 48 and a relatively low pressure, low flow  
zone 50. An airflow is created into high pressure zone 48  
10 by a blower assembly 52. Blower assembly 52 typically  
includes a fan 54, such as a centrifugal fan, e.g. an  
exemplary blower unit is a 24 volt Gamma blower.  
Similarly, airflow through low pressure zone 50 is created  
by a blower 56. In the embodiment illustrated, blower 56  
15 comprises a fan integral with an internal power supply 58  
oriented such that its fan discharges airflow into low  
pressure zone 50.

Preferably, blower assembly 52 discharges airflow at a  
20 greater rate and pressure than blower 56. Thus, the air  
pressure created in high pressure zone 48 is maintained at  
a higher level than the air pressure in low pressure zone  
50 during operation of the fans. This ensures sufficient

airflow across densely packed, heat producing components disposed within high pressure zone 48 of chassis 34.

To ensure that minimal high pressure air from zone 48  
5 flows into low pressure zone 50, open areas between the zones have been blocked by an air baffle 60. Air baffle 60 prevents the output of blower assembly 52 from disrupting the air flow created through low pressure zone 50 by blower 56.

10

Exemplary components disposed in high pressure zone 48 include one or more, e.g. two, processors 62, each coupled to a corresponding heat sink 64. Each heat sink 64 includes a plurality of cooling fins 66 that decrease in  
15 height along an inwardly directed end to provide additional room for other components. For example, a plurality of memory modules 68, e.g. DIMMs, may be mounted within high pressure zone 48 at an angle to facilitate the low profile design of chassis 34. In this embodiment, memory modules  
20 68 are disposed at an angle over at least one of the heat sinks 64, but the decreasing height of the inwardly disposed cooling fins permit the memory modules to be so oriented without contacting the heat sink. Another

exemplary component disposed in high pressure zone 48 is a PCI card 70.

In operation, blower assembly 52 draws air in along  
5 drives 38 and discharges the airflow into high pressure  
zone 48. The size and capacity of the fan is adjusted  
according to the size of chassis 34 and the layout of  
components disposed in high pressure zone 48. However, the  
capacity should be sufficient to create enough pressure in  
10 high pressure zone 48 that the necessary quantity of  
cooling air passes across the components disposed in zone  
48, e.g. heat sinks 64 and memory modules 68.

Preferably, the airflow is discharged towards the rear  
15 of chassis 34. In the illustrated embodiment, chassis 34  
includes a cutout region 72 for receiving an air outlet or  
vent through which air is discharged from high pressure  
zone 48. For example, a vent region 74 may be disposed in  
a cover 76 designed to fit over chassis 34 and enclose high  
20 pressure zone 48 and low pressure zone 50. Vent region 74  
is disposed in a "scooped" region 78 of cover 76. When  
cover 76 is disposed on chassis 34, scooped region 78  
extends inwardly into the interior of chassis 34 in high  
pressure zone 48 along cutout region 72. As illustrated

best in Figure 5, vent region 74 includes a vent and preferably a plurality of vents 80 that permit the airflow to exit generally in a direction in line with the discharge from blower assembly 52. Exemplary vents 80 are formed as  
5 a plurality of louvers along scooped region 78.

Cover 76 also may include an air inlet 82 and an air outlet 84 for blower 56, or alternatively, inlet 82 and outlet 84 can be formed through chassis 34. As blower 56  
10 is operated, air is drawn through inlet 82 along the combined CD/floppy drive and into the power supply assembly 58. The air is discharged from blower 56 into low pressure zone 50 until it exits through outlet 84. Low pressure zone 50 may include a variety of components that vary  
15 according to the design of chassis 34 and server 30. In the exemplary embodiment, low pressure zone 50 includes a PCI card 86, an inline EMI filter 88 and an internal array controller cable tray 90.

20 Other features of server 30 include a dual PCI card and an ejectable riser assembly 92 to which PCI cards 70 and 86 are attached. Also, DIMM modules 68 and processors 62 preferably are attached to a motherboard 94. Drives 38 are coupled to a removable SCSI back plane 96. A raid on a

chip (ROC) board 98 is disposed intermediate blower  
assembly 52 and power supply 58. A power switch and LED PC  
board 100 is deployed within chassis 34 generally proximate  
indicator panel 46 for cooperation therewith. A back plane  
5 102 for the combined CD and floppy assembly is deployed  
between floppy drive assembly 42/CD assembly 40 and power  
supply 58. Additionally, a pair of mounting rails 104 can  
be attached to the sides of chassis 34 to permit engagement  
with corresponding rails of rack system 32, as described  
10 below. It should be noted that a variety of component  
arrangements can be utilized, however, the exemplary  
illustrated arrangement provides for a dense packaging of  
components separated into two cooling zones that are able  
to readily maintain the components at desirable operating  
15 temperatures. Several of the unique, inventive features  
that facilitate the above-described packaging are described  
below.

One of the unique features of server 30 is cable tray  
20 90. In low profile servers, such as the illustrated 1U  
server, larger SCSI cables can interfere with the fit of  
internal components as well as being detrimental to thermal  
performance, e.g. heat removal. Cable tray 90 is designed  
to hold an SCSI cable 106 and to lie generally flat along a

floor 108 of chassis 34. The low profile tray holds cable 106 substantially out of the airflow through low pressure zone 50. Thus, cable 106 can be used to form an electrical connection between a PCI card and motherboard 94 without  
5 interrupting airflow and thermal performance. Preferably, cable tray 90 includes a flat base 109 and a plurality of tabs 110 that extend over and retain cable 106, as illustrated in Figures 5 and 6. Preferably, tabs 110 extend upwardly from flat base 109 and may be integrally  
10 formed with flat base 109, as by plastic injection molding.

In the particular embodiment illustrated, SCSI cable 106 is connected to the board edge of motherboard 94 by an SCSI connector 112. Electrically, a control signal is  
15 implemented on an internal SCSI connector for an adapter to electrically switch the signal paths from being driven by an onboard controller to being driven by the adapter controller. The signal path preferably is optimized so that when no adapters are plugged in, there will be  
20 negligible impact on the signal quality.

Another feature that facilitates the dense packaging of components within chassis 34 is riser assembly 92, illustrated best in Figures 7 through 10A. The design of



riser assembly 92 permits the mounting of at least two full length PCI cards, such as PCI cards 70 and 86, as illustrated in Figures 8 through 10. Riser assembly 92 includes a framework 120 having a center frame portion 122  
5 disposed between PCI cards 70 and 86 and a pair of frame ends 124, 126 that are disposed generally perpendicular to center frame portion 122. Frame ends 124 and 126 preferably are spaced apart to slidably receive PCI cards 70 and 86. Typically, each frame end 124 and 126 includes  
10 appropriate supports 128 for supporting each PCI card.

Additionally, riser assembly 92 includes a PCI riser card 130 disposed along center frame portion 122. A pair of oppositely facing connectors 132 are electrically  
15 coupled to PCI riser card 130 and extend in opposite directions therefrom for coupling with PCI card 70 and PCI card 86. Connectors 132 are mounted to PCI riser card 130 in a vertically staggered arrangement. Additionally, a riser card connector 134 is mounted to riser card 130 and  
20 configured for connection with motherboard 94 at a connection location 136 (see Figure 6) to permit communication with PCI cards 70 and 86.

Additionally, riser assembly 92 includes a lever and preferably a pair of levers 138 connected by a handle 140. Lever or levers 138 are pivotably mounted to riser assembly 92, preferably at center frame portion 122 for pivotable  
5 motion about a pivot mount 142. Each lever 138 also includes an engagement end 144 that has an engagement feature, such as a recess 146 designed to engage a rib 148, typically mounted on chassis floor 108 (see also Figure 6).

10 When riser assembly 92 is moved downwardly into chassis 34 (generally over cable tray 90), engagement end 144 and recess 146 engage rib 148, as illustrated best in Figure 9. Handle 140 is then pressed to pivot lever 138 about pivot 142, thereby driving riser card connector 134  
15 into engagement with a corresponding connector, e.g. a connector on motherboard 94, and riser assembly 92 into proper position. To remove riser assembly 92, handle 140 simply is pulled upwardly which moves riser assembly 92 and riser card connector 134 laterally to permit lifting of the  
20 entire assembly from chassis 34.

It should be noted that riser assembly 92 may be further secured in chassis 34 by a plurality of engagement features. For example, as illustrated in Figures 10 and

10A, a plurality of pins and receptor slots can be used to secure riser assembly 92 into chassis 34 when levers 138 are pivoted to an installed position. As illustrated in Figure 10, frame end 126 may be designed with a pin 150 and  
5 a receiving slot 152 that are located for engagement with a corresponding receiving slot 154 and pin 156, respectively, that are attached to chassis 34. In this embodiment, receiving slot 134 is formed in a tab 158 that extends upwardly from chassis floor 108, and pin 156 also is formed  
10 to extend generally upwardly from chassis floor 108 for sliding engagement with receiving slot 152.

As illustrated best in Figure 10A, riser assembly 92 may also include one or more, e.g. two, pegs 160 that  
15 extend generally downwardly from the bottom of center frame portion 122. Pegs 160 are located for engagement with corresponding slots 162 formed in a bracket 164 mounted to chassis floor 108 (see also Figure 6). Bracket 164 and slots 162 are designed to engage and retain pegs 160 when  
20 levers 138 move riser assembly 92 into its installed position, as illustrated best in Figure 8.

Another unique feature of server 30 is an indicator system 162 illustrated in Figures 11 through 13. Indicator

system 162 permits a technician to identify the appropriate server 30, or other processor-based device, that requires attention and to disconnect the unit without risking disconnection of the wrong unit.

5

When multiple servers are mounted in a rack, particularly when the units have low profiles, such as 1U servers, it can be difficult for a technician to ensure that he or she unplugs the proper unit at the rear when the  
10 unit was initially identified from the front. Thus, indicator system 162 can be activated to provide an indicator of the desired server from the front of the server and from the rear of the server. A variety of tags, logos, audible indicators etc. could be activated by an  
15 actuator to provide appropriate designation of the server requiring attention.

However, a preferred indicator system 162 provides a front switch 164 and a front light 166, as illustrated in  
20 Figure 11. Similarly, exemplary indicator system 162 provides a rear switch 168 and a rear light 170, as illustrated in Figure 12. When either front switch 164 or rear switch 168 is depressed while lights 166 and 170 are off, both lights 166 and 170 are illuminated. If either

switch 164 or 168 is depressed while lights 166 and 170 are illuminated, both lights 166 and 170 turn off.

This allows an individual to identify a unit requiring  
5 attention from the front. Once identified, front switch  
164 is depressed to illuminate front light 166 and rear  
light 170. The individual may then walk around to the back  
of a rack containing multiple units, identify the unit  
having an illuminated rear light 170, and unplug cables  
10 from the unit. The unit then can be removed from the front  
of the rack for service or replacement. This prevents the  
inadvertent disconnection of the wrong unit. Lights 166  
and 170 preferably have a visually noticeable color, such  
as a blue color.

15

An exemplary circuit for use in indicator system 162  
is illustrated in Figure 13 and the functionality of the  
circuit is illustrated in Figure 13a. The exemplary  
circuit may be powered by an auxiliary power supply Vaux  
20 172. Power supply 172 may be separated from the main  
system power supply which allows the circuitry to be  
operated even when the main system power is off. Other  
components of the circuit include a NAND-gate 174, a D-  
flipflop 176 and an inverter 178.

In this exemplary embodiment, the D-flipflop 176 is illustrated after its reset condition, that is its output Q is low and Q/ is high. When either push button 164 or 168 is depressed, the signal line PUSH/ (labeled 172a) level changes from high to low. This signal transition causes the clock input signal, CLK 166d, of D-flipflop 176 to change from low to high, via NAND-gate 174. The clock signal latches the high state at the D input, therefore changing the Q output (labeled 166c) from low to high. Because the Q output signal is passed through the inverter 178, the signal (LED-ON/ 166a) at the cathode pins of LEDs 166 and 170 is changed from high to low. This turns on or illuminates LEDs 166 and 170. At this time, the D input of the flipflop 176 is low. When either push button 164 and or 168 is depressed again, the CLK input latches the low state from the D input, causing the Q output, STATUS 166c, to change from high to low. This transition goes through the inverter 178, effectively turning off both LED 166 and LED 170.

In the embodiment illustrated, one of the NAND-gate 174 inputs also can be controlled by software designed to allow LEDs 166 and 170 to be turned on, turned off or

blinking. Application software on the server or on a remote server can be utilized to control the state of the LEDs. The D-flipflop 176 output Q/, STATUS/ 166b, also can be monitored by software. This would allow a technician from  
5 a remote site to control the state of LEDs 166 and 170 and to notify another technician in the server room as to which server requires service. Upon completion of the service work, the servicing technician would then push either button 164 or 168. The remote technician is thereby able  
10 to monitor the LED status and to determine completion of the service work. It should be noted that the figure and functionality described are exemplary, and other circuits can be used to accomplish the device identification described above.

15

Another unique feature of the exemplary server 30 is the retractable LCD 44, illustrated in Figures 14 through 17. The liquid crystal display module 44 can be moved between a retracted position, as illustrated in Figure 14,  
20 and a display or open position, as illustrated in Figure 15. The LCD module includes a display 180 that can be used as a visual interface for various information related to the operation of server 30. However, when LCD module 44 is not in use, it can be moved to the retracted position to

permit access to CD drive assembly 40 and floppy drive assembly 42.

LCD module 44 is pivotably mounted to a retraction  
5 assembly 182 by a module pivot 184 that allows LCD module  
44 to be pivoted between the display position and a  
position generally perpendicular to the front of server 30  
for retraction. Retraction assembly 182 includes an outer  
guide housing 186 disposed generally between floppy drive  
10 assembly 42/CD drive assembly 40 and drive bays 36. Outer  
guide housing 186 is designed to slidably receive LCD  
module 44 therein.

Retraction assembly 182 further includes a pivot mount  
15 bracket 188 to which module 44 is pivotably mounted via  
pivot 184, as best illustrated in Figures 16 and 17.  
Generally opposite pivot 184, bracket 188 includes one or  
more attachment features 190 to which one or more resilient  
members, such as a pair of springs 192 can be attached.  
20 Preferably, a pair of springs positioned above and below  
each other are used to balance the biasing force on pivot  
mount bracket 188 and LCD module 44 as LCD module 44 is  
drawn into an open interior 194 of outer guide housing 186.  
Exemplary springs 192 include coil springs that are pulled



to a stretched position when LCD module is moved to its open or display position. Thus, the coil springs bias LCD module 44 back into open interior 194 when module 44 is pivoted to a position generally in alignment with open interior 194. An appropriate electric line or lines 195 may be routed to LCD module 44 through outer guide housing 186, as best illustrated in Figures 16 and 17.

When units, such as servers, are stacked sequentially in rack system 32, the various cables coupled to the various server ports can be difficult to manage. This is particularly true with low profile servers, such as 1U servers, due to the relatively large number of closely spaced units. Accordingly, the densely stacked servers benefit from a cable management system 200, such as that illustrated in Figures 18 and 19. The exemplary cable management system 200 includes a tray bracket 202 mounted to and extending rearwardly from each server 30. At least one and preferably a pair of spools 204 serve as a cable support member and are mounted to tray bracket 202 in a position that permits the plurality of various cables 206 to be wrapped and held generally along the backside of server 30. Spools 204 can be mounted in a variety of locations depending on the design of server 30 and rack

system 32, but the spools are preferably located in positions to provide strain relief for the cables and to bundle the cables for routing.

5           Cable management system 200 further includes a tension device 208 and a retainer member 210. Tension device 208 and retainer 210 preferably are mounted towards the back of rack system 32 generally on a level with server 30. Retainer 210 may be mounted or formed at a position on an  
10       opposite side of rack system 32 from tension device 208, as illustrated in Figures 18 and 19. Retainer 210 also is positioned slightly rearward of tension device 208.

          In an exemplary embodiment, tension device 208  
15       comprises a tension reel 212, such as a torsion spring loaded reel, having an extensible member 214, such as a cord or cable. Extensible member 214 is connected to cable bundle 206 at a location intermediate the cable connectors plugged into the rear of server 30 and retainer 210.  
20       Specifically, extensible member 214 is connected to cable bundle 206 generally intermediate the position at which cable bundle 206 is in contact with retainer 210 and the position of the closest spool 204. Thus, when a specific server 30 is slid to an extended position in rack system

32, extension member 214 is pulled outwardly, as  
illustrated in Figure 19. However, when the server is  
returned to its retracted position within rack system 32,  
extension member 214 is retracted into tension reel 212,  
5 thereby pulling cable bundle 206 to a neatly folded  
position to the rear of server 30, as illustrated in Figure  
18.

When multiple thin profile devices, e.g. servers, are  
10 mounted in a rack system 32, a rack rail must be positioned  
for engagement with the side mounting rails 104 attached to  
chassis 34 of each device 30. With low profile devices,  
multiple rails must be deployed in rack system 32 to  
receive the multiple corresponding servers. To facilitate  
15 assembly of rack system 32, and specifically the attachment  
of rack rails for supporting each device 30, unique rails  
have been designed for easy insertion and removal.

As illustrated best in Figure 20, a preferred rack  
20 system includes a front support member 220 and a back  
support member 222 on each side of rack system 32. Front  
support member 220 includes a plurality of mounting  
openings 224 that inhabit a substantial portion of the  
member. Similarly, rear support member 222 includes a

plurality of mounting openings 226 that extend upwardly for a substantial distance along the support member. The mounting openings are designed to receive a rail 228 that extends from the front to the rear of rack system 32  
5 between front support member 220 and rear support member 222. It should be noted that mounting openings 224 and 226 can be in a variety of configurations and can be changed to mounting tabs, brackets or other features able to engage the corresponding mounting ends of each rail 228.

10

In the illustrated embodiment, each rail 228 includes a rear mounting end 230 and a front mounting 232. Each mounting end 230, 232 includes engagement features for engaging the mounting structures along front and rear  
15 support members 220, 222. In the exemplary, illustrated embodiment, rear mounting end 230 and front mounting end 232 each include a pair of tabs 234 sized and spaced for receipt in corresponding mounting openings 222. Thus, rail 228 may be positioned at multiple different locations along  
20 support members 220 and 222.

In the preferred embodiment, rear mounting end 230 is fixed and front mounting end 232 is resiliently movable. Alternatively, rear mounting end 230 can be made

resiliently movable, or both mounting ends can be made resiliently movable. Regardless, an exemplary resiliently movable mechanism 236 is illustrated best in Figure 21.

5           In this embodiment, rail 228 includes a first rail portion 238 and a second rail portion 240 that may be slidably coupled to first rail portion 238 by a plurality of pins or fasteners 242. As illustrated, second rail portion 240 is formed with a pair of slots through which  
10 pins 242 extend into contact with corresponding mounting brackets 244 disposed on the interior of first rail portion 238. Heads 246 of pins 242 retain second rail portion 240 slidably trapped against first rail portion 238. In this embodiment, front mounting end 232 is formed at the front  
15 of second rail portion 240 for selective, sliding movement into and out of engagement with mounting openings 224 of front support member 220. Front mounting end 232 may include a bumper 248 to buffer the contact between first rail portion 238 and second rail portion 240 when sliding  
20 second rail portion 240 farther into first rail portion 238.

To ensure that rear mounting end 230 and front mounting end 232 remain firmly connected to rear support

member 222 and front support member 220, respectively,  
second rail portion 240 is biased outwardly from first rail  
portion 238 by a biasing system 250. An exemplary biasing  
system 250 includes a coil spring 252 disposed within a  
5 channel 254 located on the interior of first rail portion  
238. An abutment tab 256 is disposed at an interior end of  
channel 254. A second abutment tab 258 extends inwardly  
from second rail portion 240 generally at an end of spring  
252 longitudinally opposite of abutment tab 256 when second  
10 rail portion 240 is slidably mounted to first rail portion  
238.

Thus, spring 252 biases second rail portion 240 and  
mounting end 232 in an outward direction to firmly move  
15 rear mounting end 230 and front mounting end 232 into  
engagement with rear support member 222 and front support  
member 220, respectively. However, rail 228 can quickly  
and easily be removed by overcoming the bias of spring 252  
and forcing second rail portion 240 to slide inwardly into  
20 first rail portion 238. This resilient, movable mechanism  
236 permits quick installation and removal of rails 228  
from rack system 32 to accommodate the mounting of multiple  
devices, such as servers without the use of screws or other  
types of fasteners.

The actual features of rails 228 by which each server  
30 is slidably mounted thereto depends on the configuration  
of mounting rails 104. However, a variety of available  
5 sliding rails 104 and corresponding mounting rails 228 can  
be utilized, as known to those of ordinary skill in the  
art.

It will be understood that the foregoing description  
10 is of preferred embodiments of this invention, and that the  
invention is not limited to the specific forms shown. For  
example, a variety of devices other than servers can  
benefit from the various features described herein; the  
configuration of the overall chassis and the location of  
15 components can be adjusted according to a specific  
application; the size and capacity of the blower assemblies  
can be adjusted according to each application; and a  
variety of materials can be utilized in the construction of  
various components described herein. These and other  
20 modifications may be made in the design and arrangement of  
the elements without departing from the scope of the  
invention as expressed in the appended claims.

CLAIMS

What is claimed is:

5           1.    A server system, comprising:

                  a server having a retractable LCD module,  
                                wherein the LCD module may be  
                                selectively moved between an open  
10                       position and a retracted position  
                                within a chassis of the server.

                  2.    The server system as recited in claim 1, further  
                  comprising a resilient member connected to the LCD module  
15                       to bias the LCD module towards the retracted position.

                  3.    The server system as recited in claim 2, wherein  
                  the resilient member comprises a spring.

20           4.    The server system as recited in claim 3, wherein  
                  the spring comprises a pair of springs.



5. The server system as recited in claim 3, further comprising an outer guide housing for receiving the LCD module.

5 6. The server system as recited in claim 5, further comprising a retraction assembly to which the LCD module is pivotably attached.

7. The server system as recited in claim 6, wherein  
10 the server includes a front, the outer guide housing being oriented generally perpendicular to the front.

8. The server system as recited in claim 7, wherein  
the server further includes a floppy drive assembly and a  
15 CD drive assembly, the LCD module being disposed generally in front of the floppy drive assembly and the CD drive assembly when in the open position.

9. The server system as recited in claim 8, wherein  
20 the LCD module is pivoted to a position generally perpendicular to the front of the server before moving to the retracted position.

10. A retractable module system, comprising:

an LCD module;

5 a guide housing sized to retractably receive the  
LCD module; and

a resilient member disposed in the guide housing  
and connected to the LCD module to bias the  
10 LCD module to a retracted position.

11. The retractable module system as recited in claim  
10, wherein the resilient member comprises a spring.

15 12. The retractable module system as recited in claim  
11, wherein the spring is connected to the LCD module by a  
bracket.

13. The retractable module system as recited in claim  
20 12, wherein the LCD module is pivotably connected to the  
bracket.

14. The retractable module system as recited in claim 13, wherein the LCD module may be pulled from the guide housing and pivoted to an open position.

5        15. A system for facilitating the display of information related to a specific device, comprising:

a processor-based device having a chassis; and

10        an information display module that may be moved between a retracted position within the chassis and an open position.

15        16. The system as recited in claim 15, wherein the processor-based device comprises a server.

17. The system as recited in claim 16, further comprising a resilient member connected to the LCD module to bias the LCD module towards the retracted position.

20

18. The server system as recited in claim 16, wherein the resilient member comprises a spring.

19. The server system as recited in claim 18, wherein the spring comprises a pair of springs.

20. The server system as recited in claim 18, further  
5 comprising an outer guide housing for receiving the LCD module.

21. The server system as recited in claim 20, further comprising a retraction assembly to which the LCD module is  
10 pivotably attached.

22. The server system as recited in claim 21, wherein the server includes a front, the outer guide housing being oriented generally perpendicular to the front.  
15

23. The server system as recited in claim 22, wherein the server further includes a floppy drive assembly and a CD drive assembly, the LCD module being disposed generally in front of the floppy drive assembly and the CD drive  
20 assembly when in the open position.

24. The server system as recited in claim 23, wherein the LCD module is pivoted to a position generally

perpendicular to the front of the server before moving to the retracted position.

25. A method for conserving space in a server,  
5 comprising:

storing a display module in a guide housing  
disposed within a server; and

10 removing the display module from the guide  
housing to an open, visible position.

26. The method as recited in claim 25, wherein  
storing comprises storing an LCD module.

15

27. The method as recited in claim 26, wherein  
removing comprises pivoting the LCD module approximately 90°  
to the open, visible position.

20 28. The method as recited in claim 27, further  
comprising biasing the LCD module to a position within the  
guide housing.

5           30. The method as recited in claim 29, wherein  
pivoting comprises moving the LCD module to a position in  
front of a CD drive assembly.

ABSTRACT OF THE DISCLOSURE

A retractable display module system for use with a processor-based device, such as a server. The retractable module may comprise an LCD module that is movable between a retracted position within the chassis of the device and an open position. The system utilizes a guide housing disposed within the chassis of the device for receiving and storing the display module in a retracted, space-saving position. A resilient member, such as a spring, may be deployed in the guide housing to bias the display module into the guide housing. For use, the display module is removed from the guide housing and pivoted to the open position at a front of the device.

15

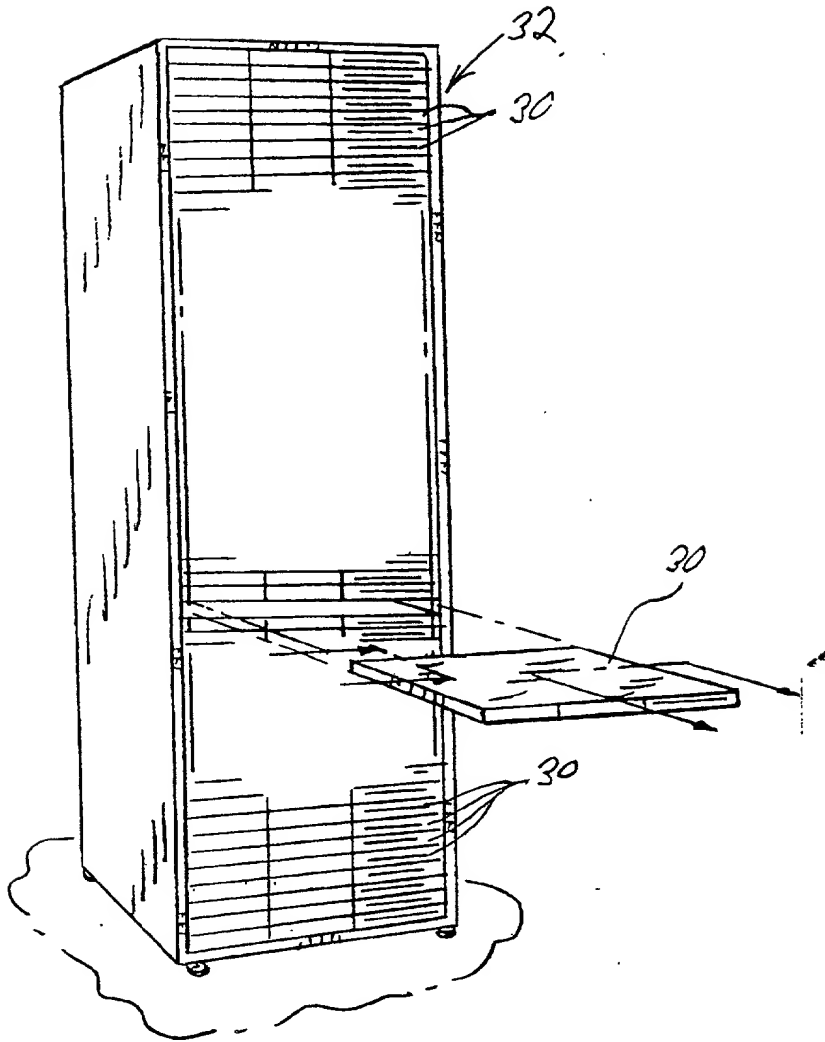


FIG. 1

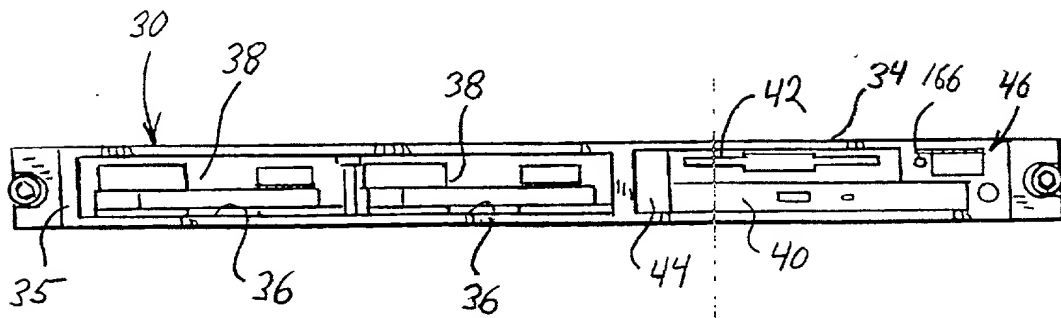


FIG. 2



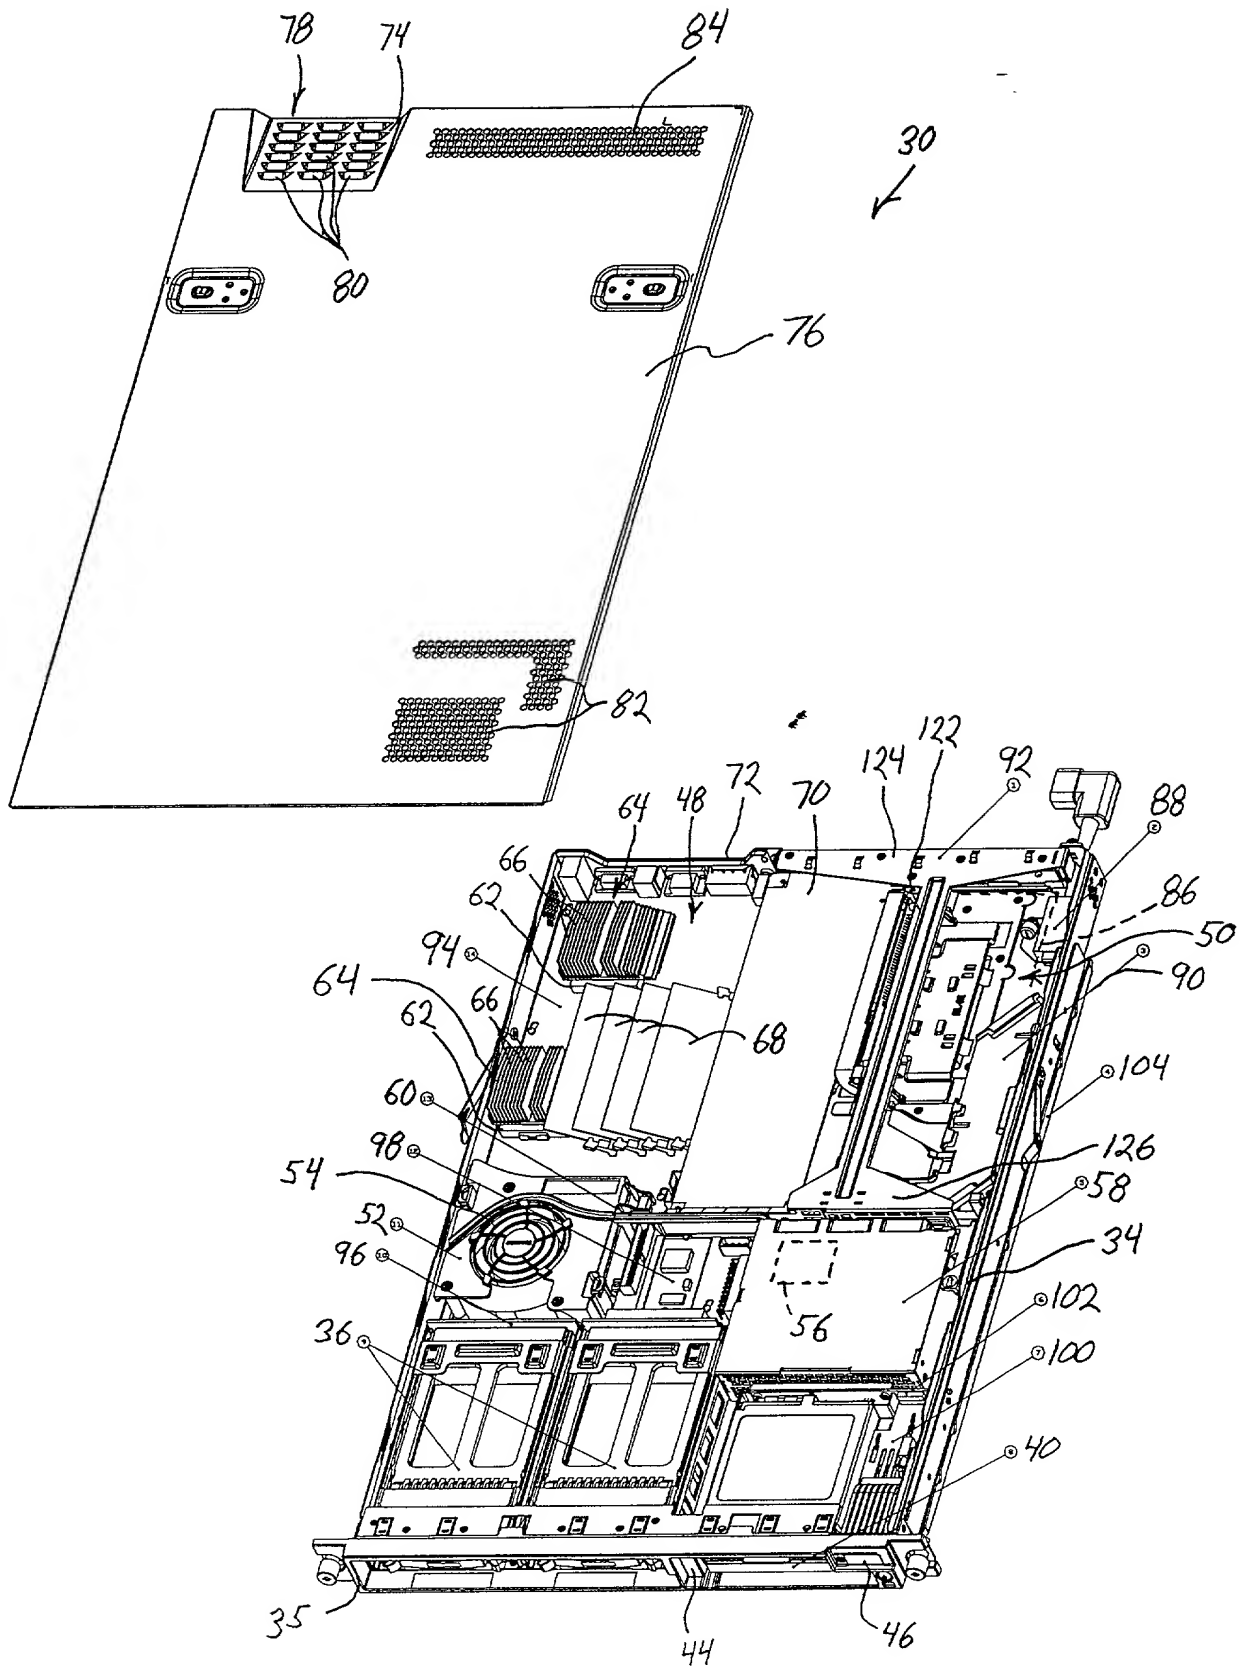


FIG. 3

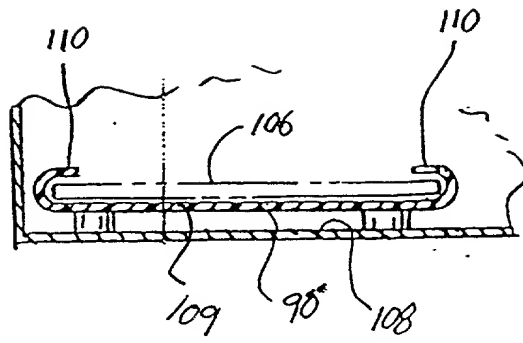
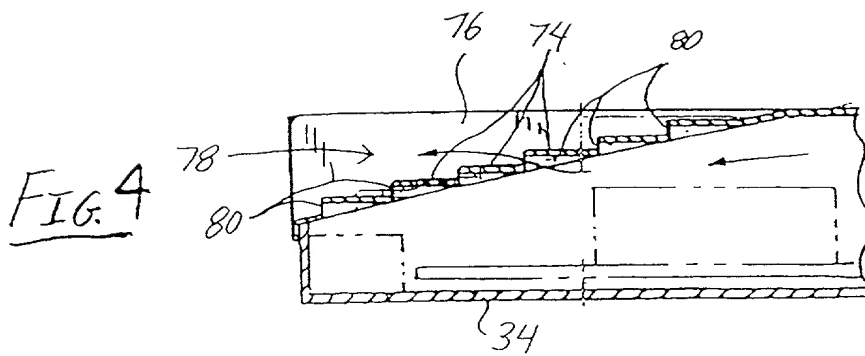


FIG. 6



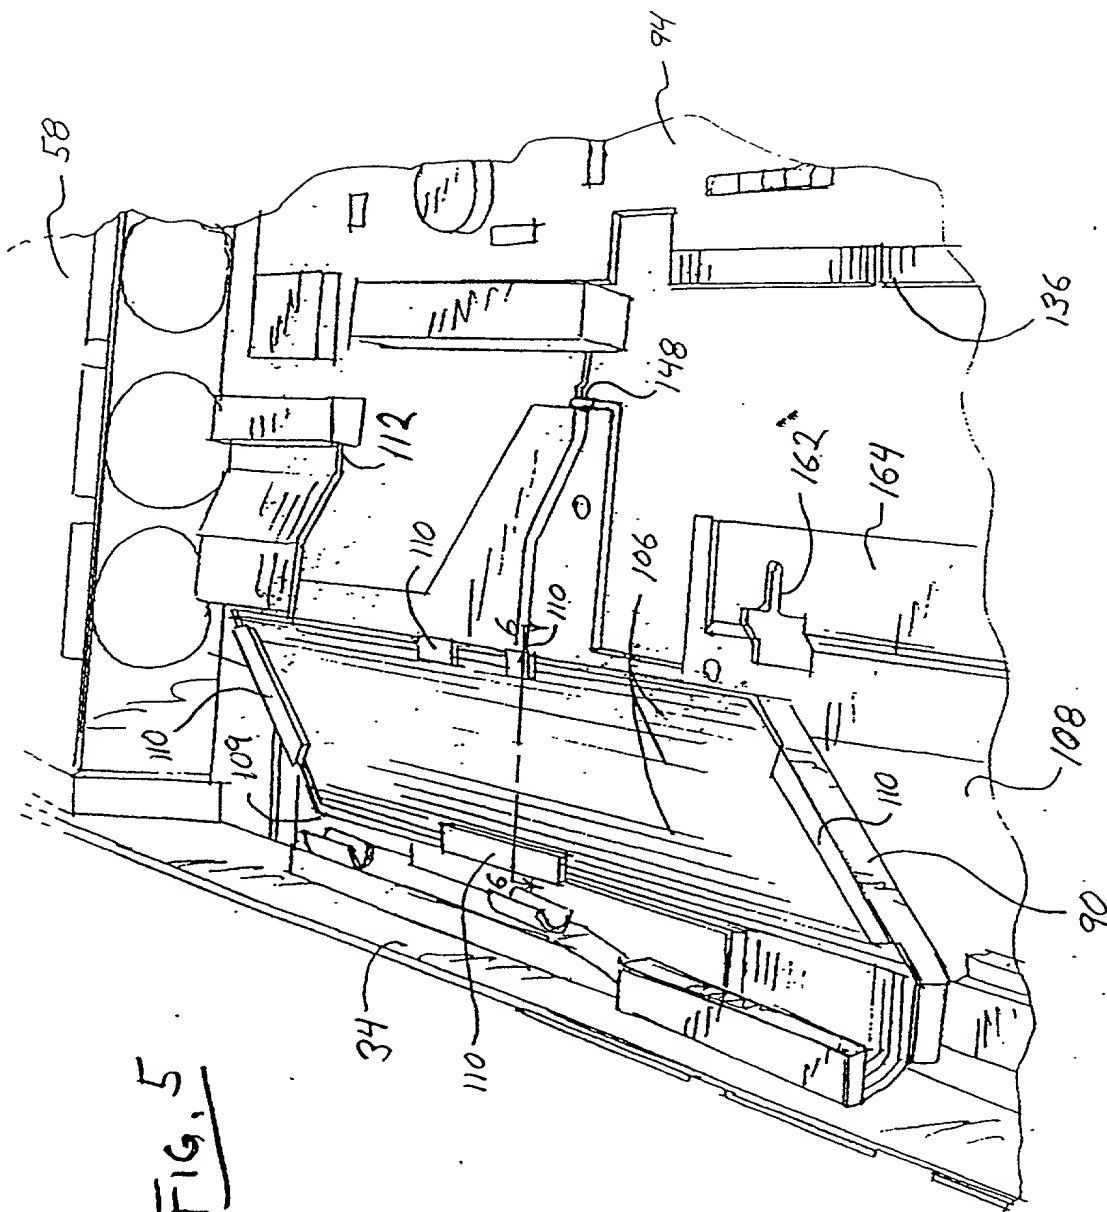


FIG. 5

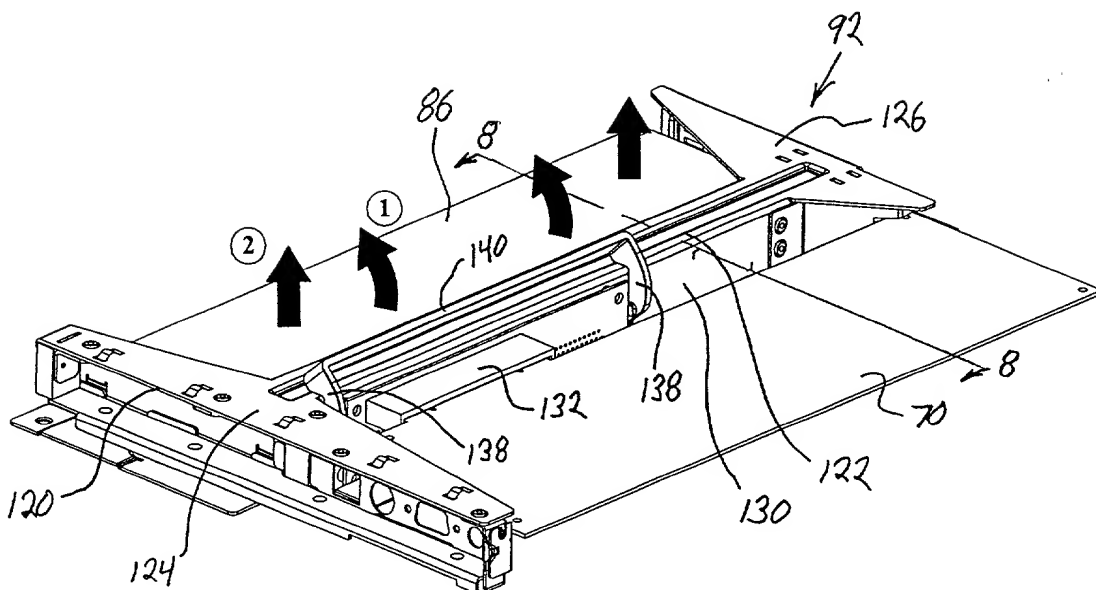


FIG. 7

- ① ROTATE HANDLE TO EJECT
- ② LIFT ASSEMBLY TO REMOVE

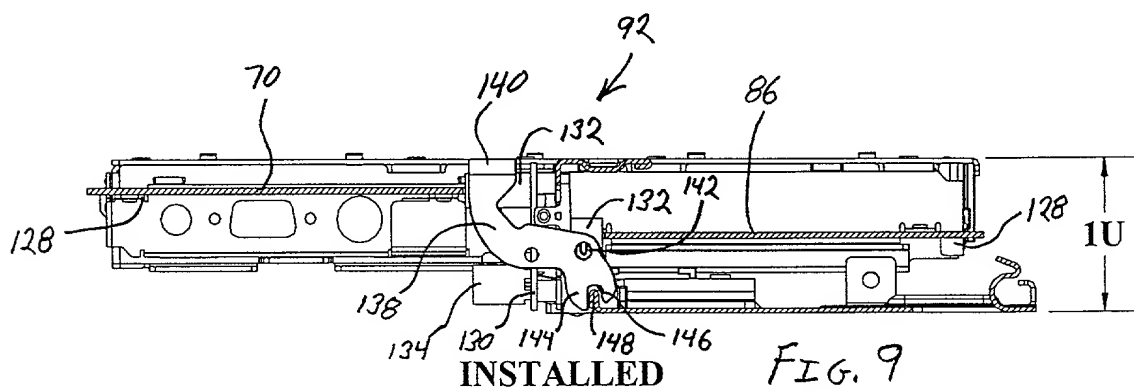


FIG. 9

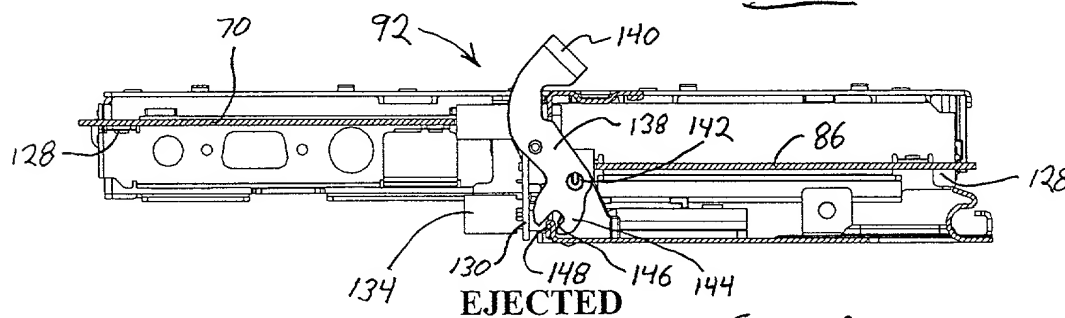
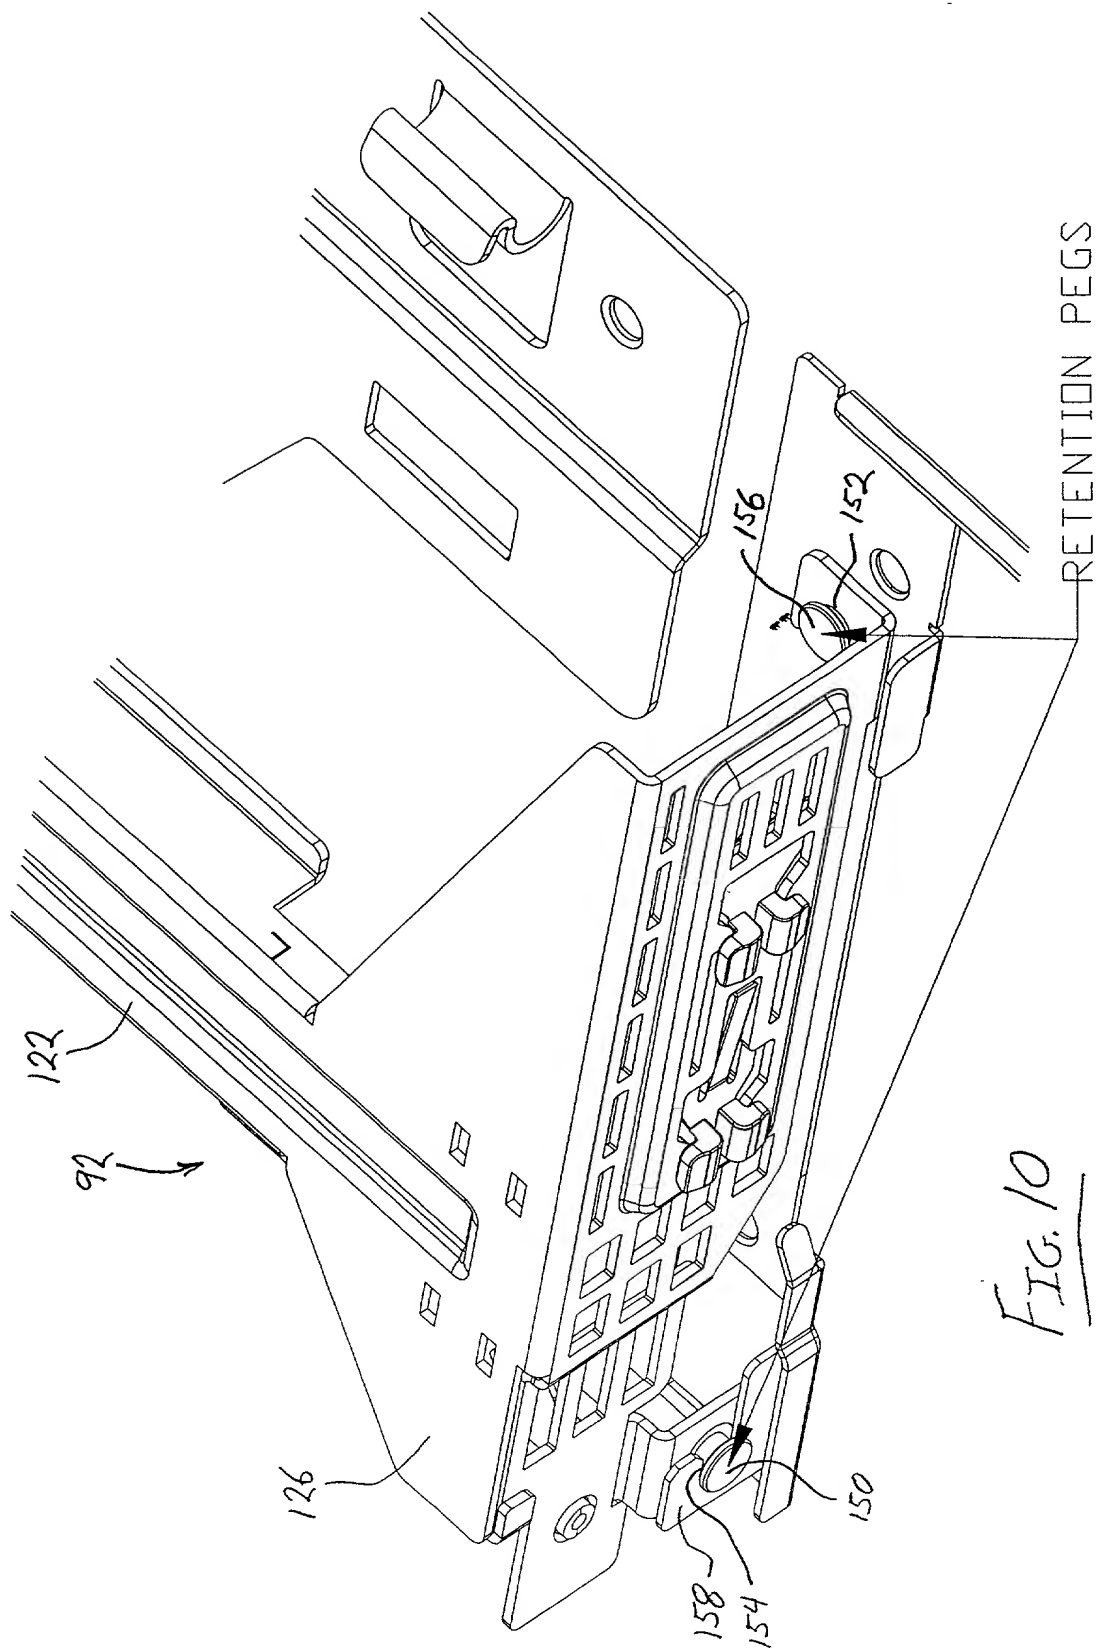


FIG. 8



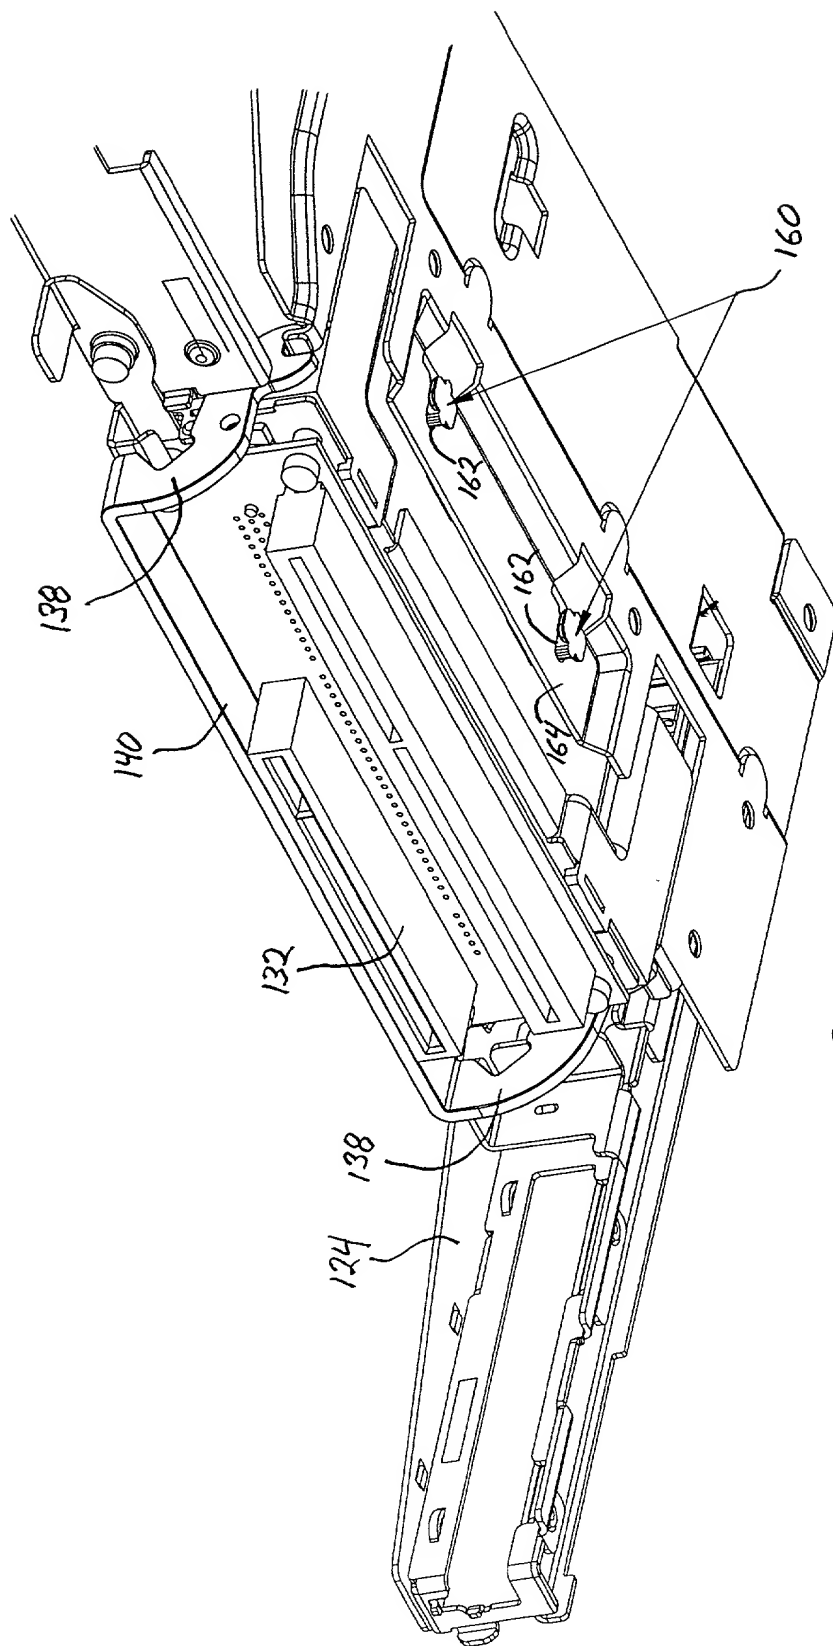


FIG. 10A

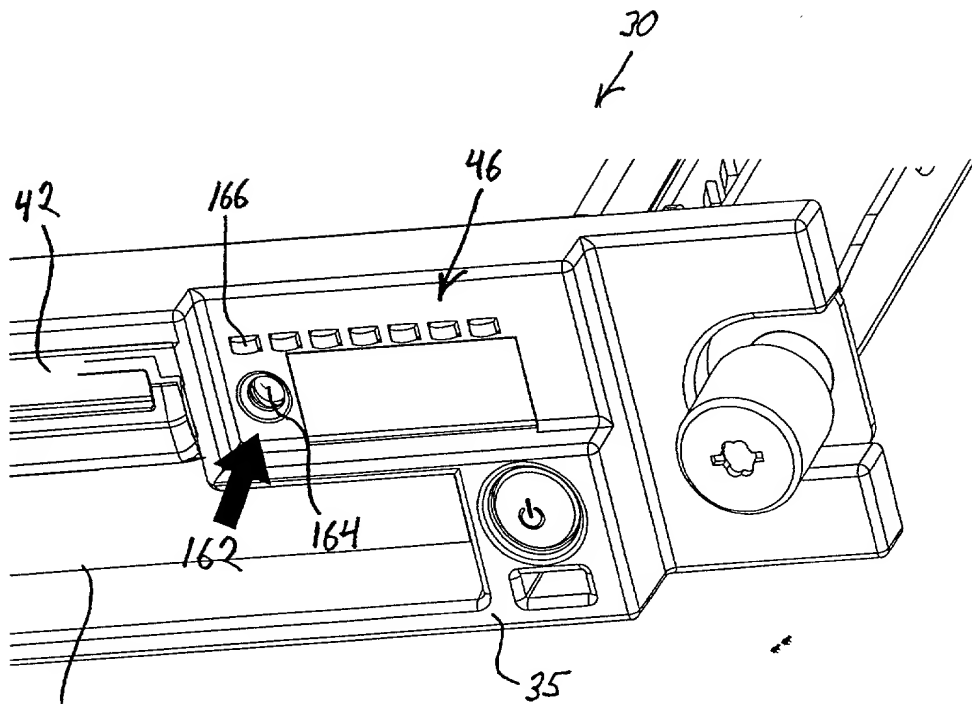


FIG. 11

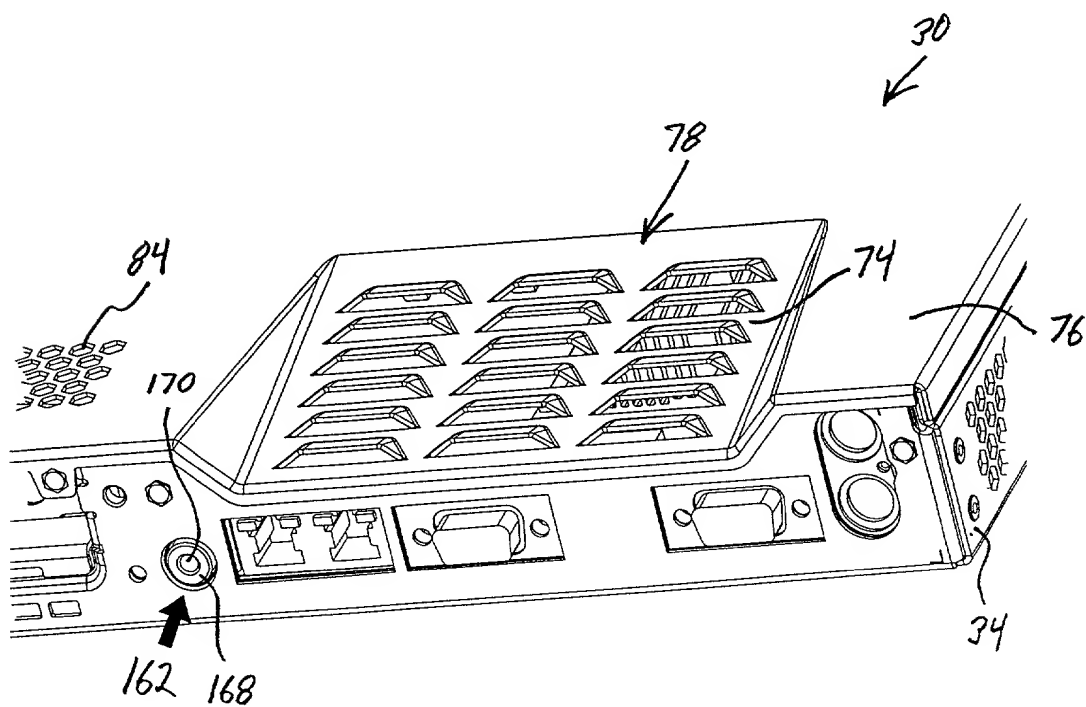


FIG. 12

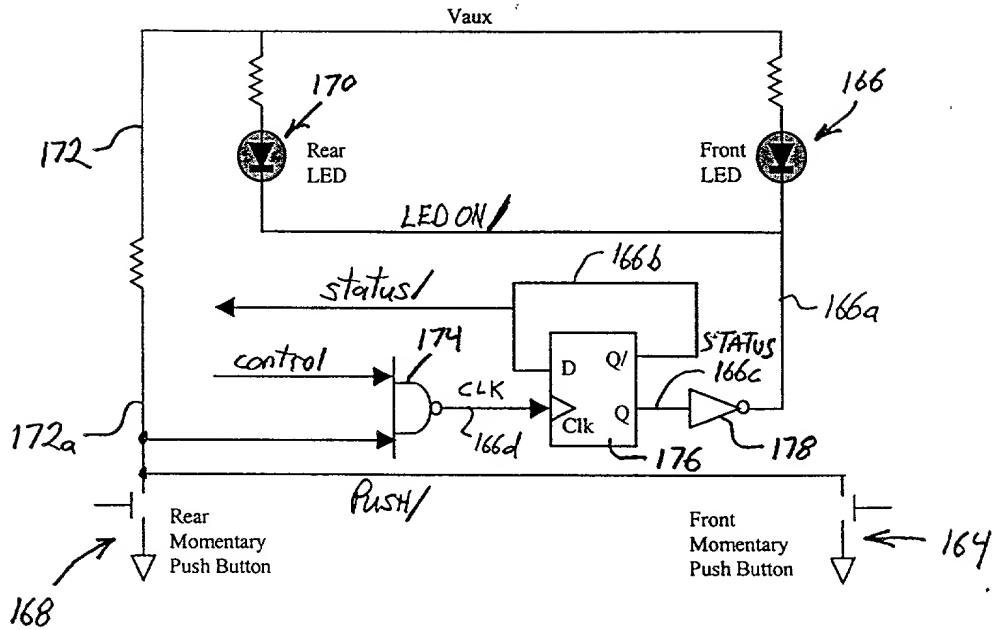


FIG. 13

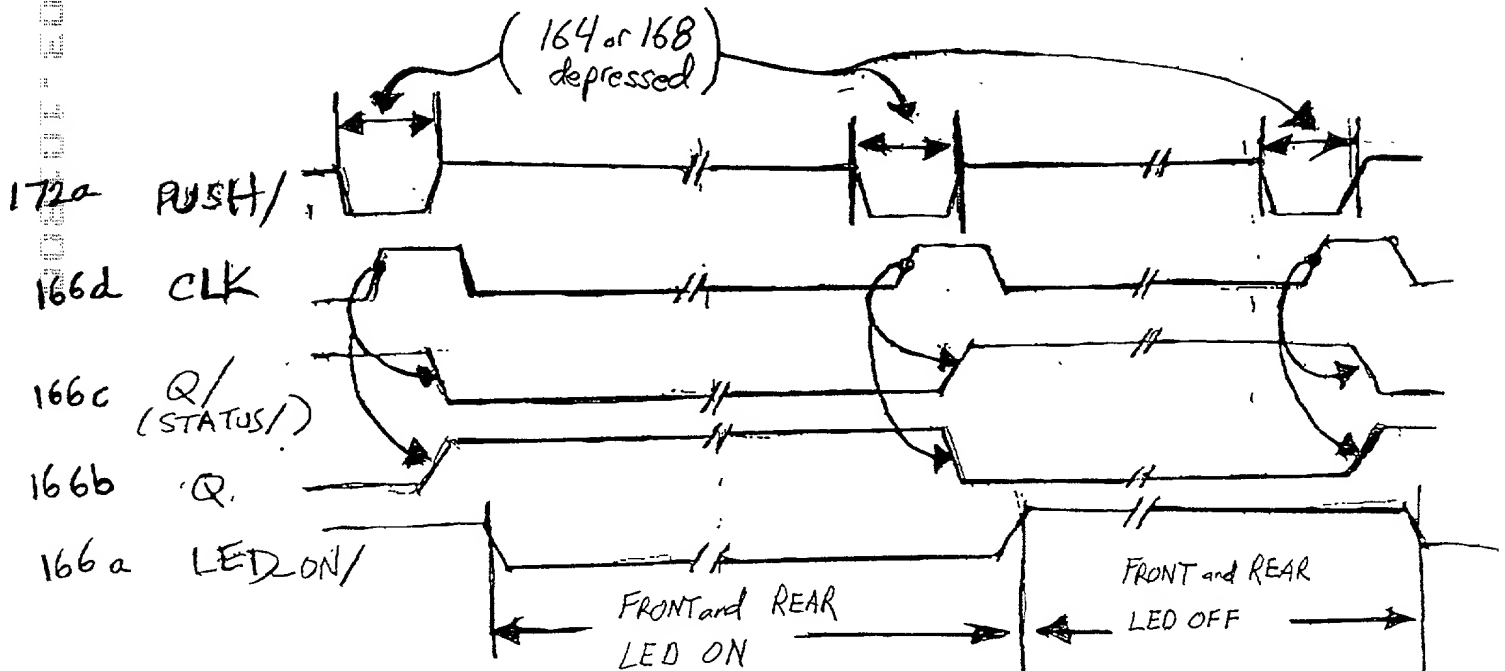


FIG. 13a



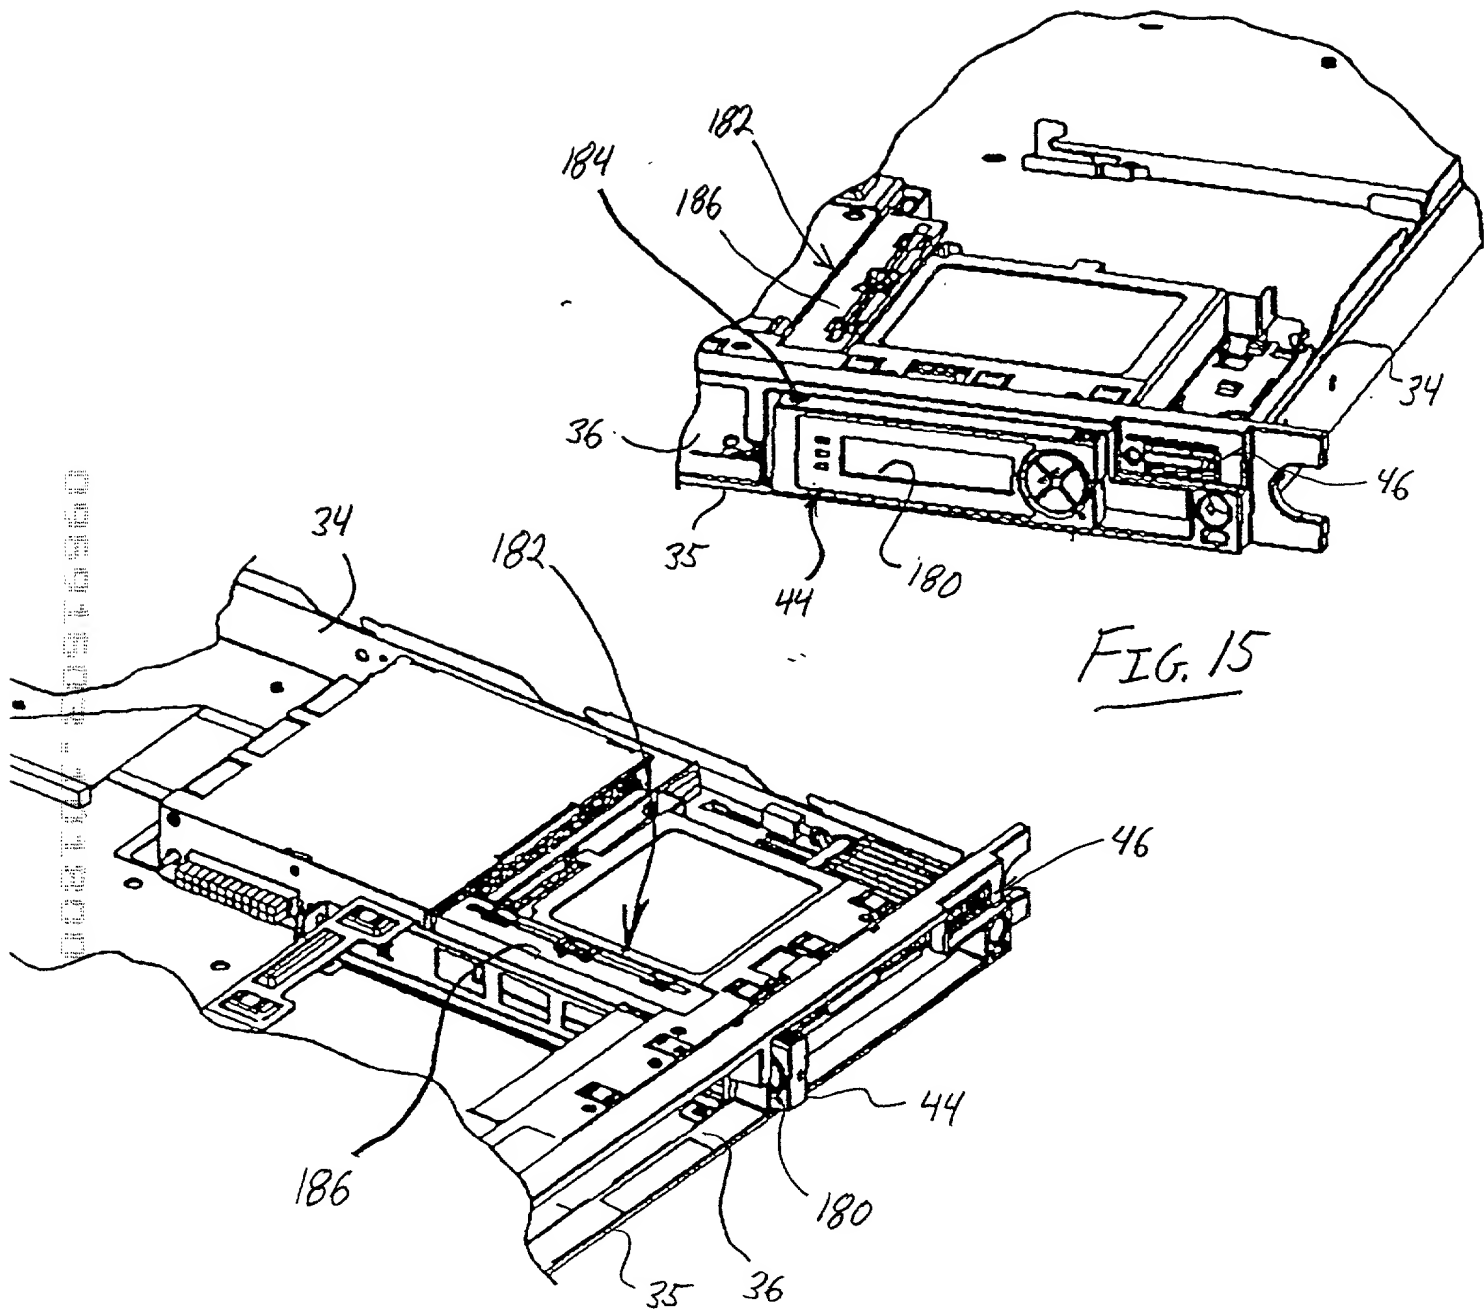
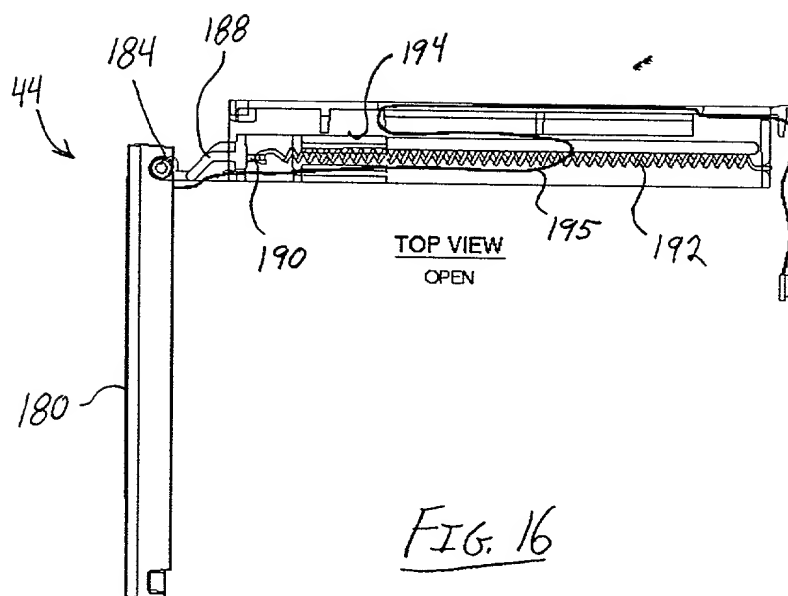


FIG. 14

FIG. 15



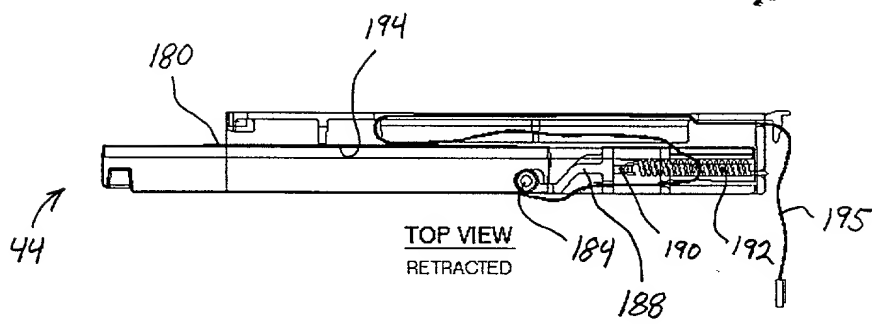


FIG. 17

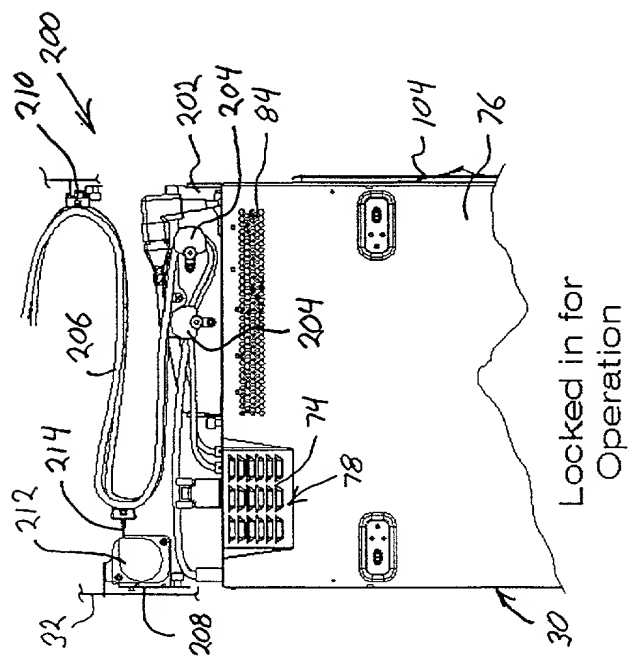


FIG. 18

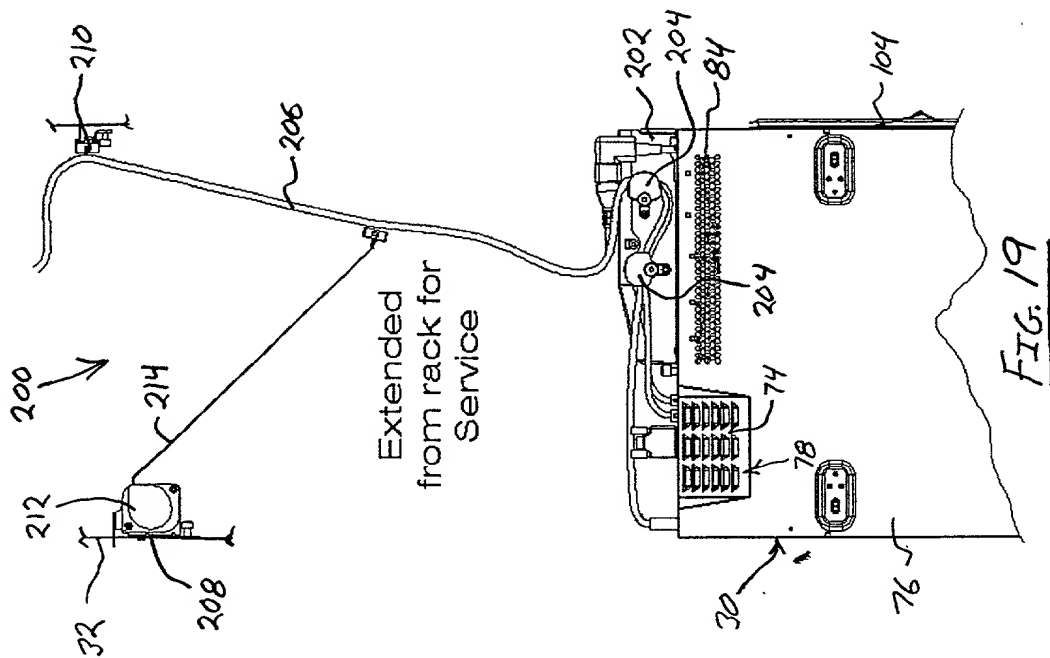


FIG. 19

09591503-104800

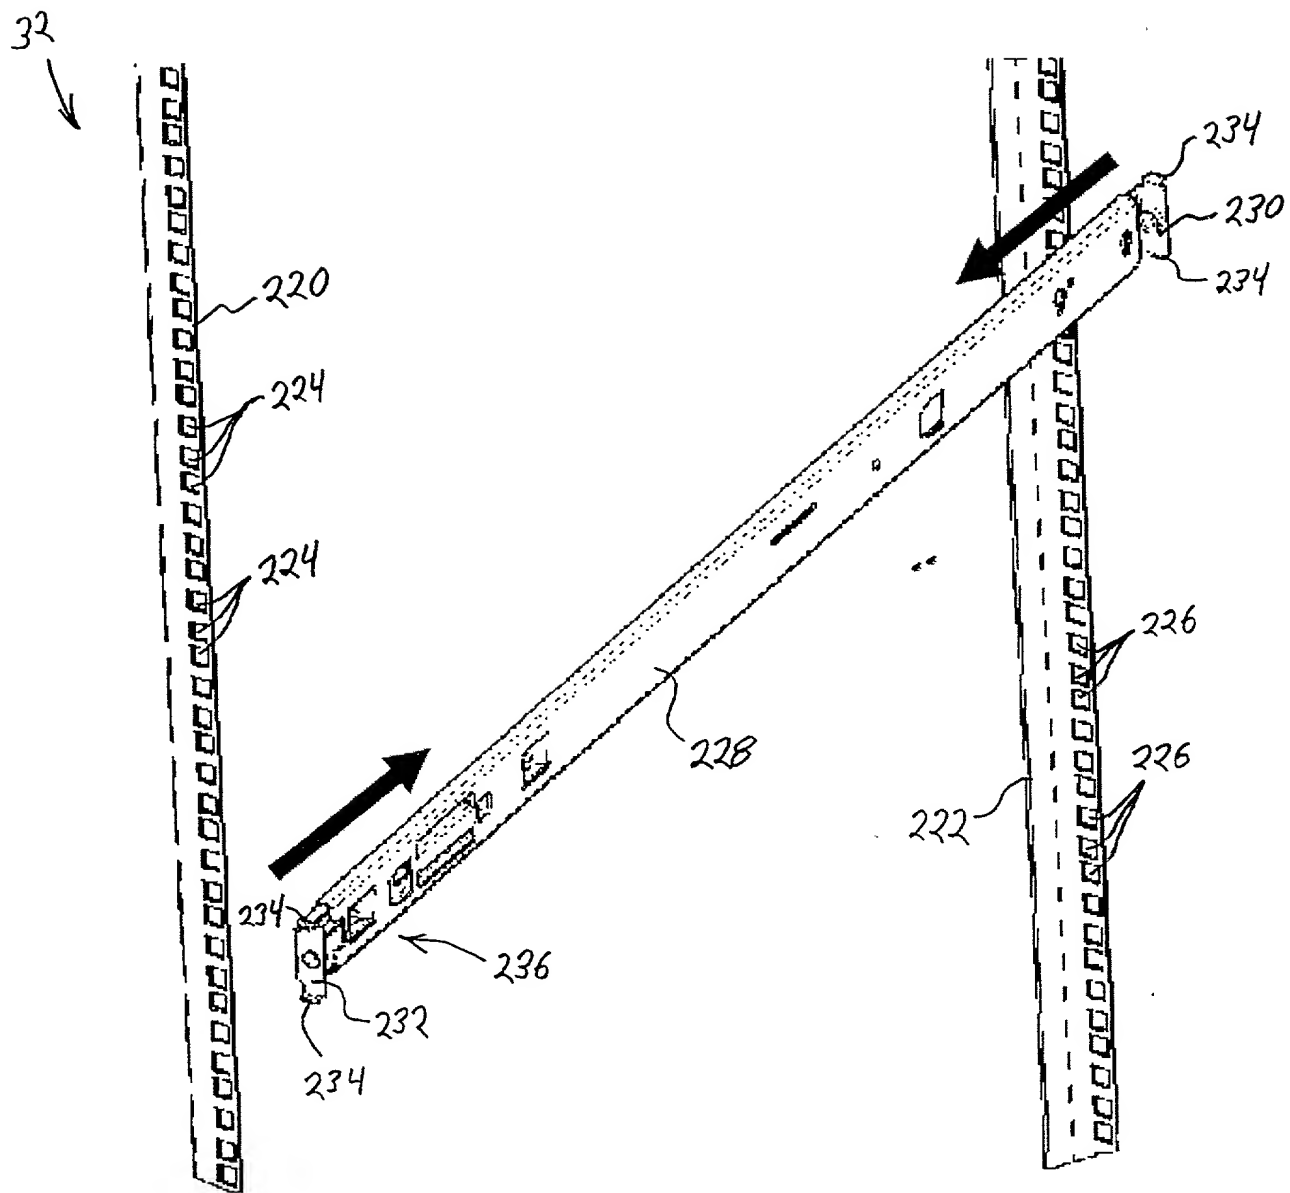


FIG. 20

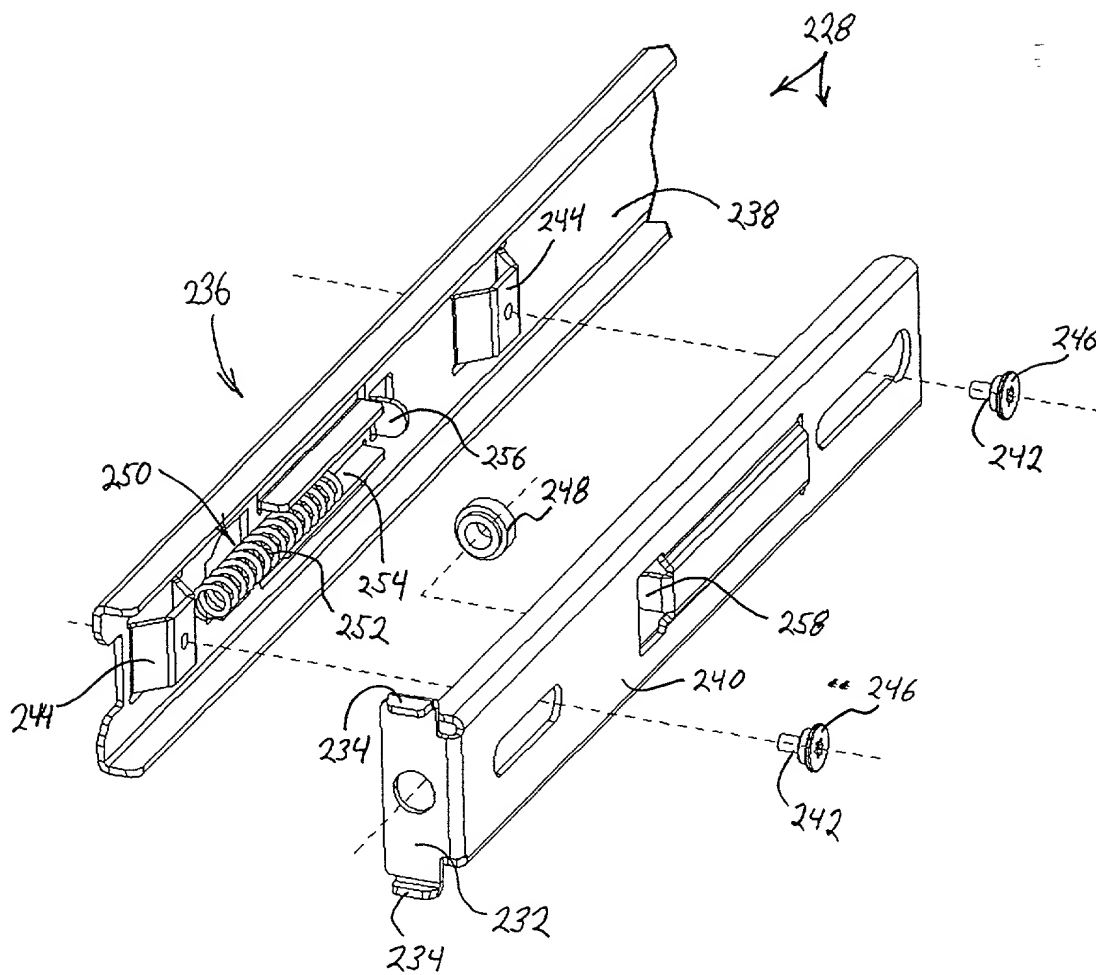


FIG. 21

**DECLARATION****SOLE/JOINT INVENTOR  
ORIGINAL/SUBSTITUTE/CIP**

As a below named inventor, I hereby declare that: my residence, post office address, and citizenship are as stated below next to my name. I believe I am the original, first, and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**RETRACTABLE DISPLAY MODULE**

as described in the specification ☒ attached or ☐ of patent Application Serial No. \_\_\_\_\_  
filed \_\_\_\_\_ and amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; that I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application; that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months prior to this application; and that I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations § 1.56(a). Such information is material when it is not cumulative to information already of record or being made of record in the application, and


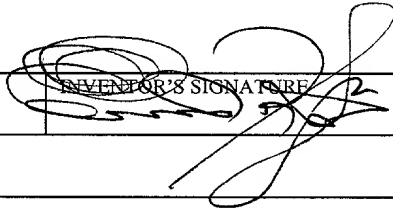
- (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) it refutes, or is inconsistent with, a position the applicant has taken or may take in:
  - (i) opposing an argument of unpatentability relied on by the Office, or
  - (ii) asserting an argument of patentability.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificates listed below and have also identified below any foreign application(s) having a filing date before that of the application(s) on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE OF FILING	PRIORITY CLAIMED UNDER 35 USC 119
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35 United States Code § 120 of any United States application(s) listed below and, insofar as any subject matter of any claim of this application is not disclosed in the prior United States Application, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations § 1.56(a) which occurred between the filing date of the prior application and the national PCT international filing date of this application:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR <b>David F. Bologna</b>	INVENTOR'S SIGNATURE 	DATE 10/15/00
RESIDENCE <b>17110 Park Lodge, Spring, Texas 77379</b>		CITIZENSHIP <b>U.S.A.</b>
POST OFFICE ADDRESS <b>same as above</b>		
FULL NAME OF SECOND JOINT INVENTOR <b>Everett R. Salinas</b>	INVENTOR'S SIGNATURE 	DATE 10.19.2000
RESIDENCE <b>6207 Canada, Pasadena, Texas 77505</b>		CITIZENSHIP <b>U.S.A.</b>
POST OFFICE ADDRESS <b>same as above</b>		

# IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant/Patentee:

David F. Bolognia et al.

Filed: Herewith

Serial No.: Unassigned

For: *RETRACTABLE DISPLAY MODULE*

§  
§  
§  
§  
§  
§  
§  
§  
§

Attorney File No.: COMP:0165  
P00-3084

## POWER OF ATTORNEY BY ASSIGNEE

Under the provisions of 37 C.F.R. § 3.71, the undersigned assignee of record of the entire interest in the above-identified patent/patent application by virtue of an assignment recorded (check as applicable):

<input checked="checked" type="checkbox"/>
<input type="checkbox"/>
<input type="checkbox"/>

Concurrently Herewith

Date Recorded

Reel \_\_\_\_\_ Frame \_\_\_\_\_

elects to conduct the prosecution of the application/maintenance of the patent to the exclusion of the inventor(s). The undersigned hereby declares that he has reviewed the above-referenced assignment and hereby declares that, to the best of his knowledge, title is in the Assignee, and further declares that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true. The assignee hereby revokes any previous powers of attorney and appoints the following to prosecute this application/maintain this patent and transact all business in the Patent and Trademark Office connected therewith:

Michael G. Fletcher 32,777  
Patrick S. Yoder 37,479  
Robert A. Van Someren 36,038  
Diana M. Sangalli 40,798

Irene Kosturakis 33,724  
Keith Lutsch 31,851  
Joseph Arrambide 39,589  
Sarah T. Harris 35,891  
Louis Brucculeri 38,834  
Richard P. Lange 27,296  
Theodore S. Park 26,971

Please direct all communications to: Fletcher, Yoder & Van Someren, P.O. Box 692289, Houston, Texas 77269-2289, (281) 970-4545, to the attention of: Robert A. Van Someren

## ASSIGNEE

COMPAQ COMPUTER CORPORATION

Date: 18 OCT 2000 BY: \_\_\_\_\_

NAME: Diane Strong  
TITLE: Administrator, Patents

Diane Strong  
Administrator, Patents  
Authorized To Sign This Document On Behalf Of  
Compaq Computer Corporation  
Pursuant To Board Of Directors Resolution  
Date July 28, 1989